



PATENT  
450110-03117

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Vincent Carl HARRADINE et al.  
Serial No. : 10/016,823  
Filed : December 4, 2001  
For : AUDIO AND/OR VIDEO GENERATION APPARATUS AND  
METHOD OF GENERATING AUDIO AND/OR VIDEO  
SIGNALS  
Art Unit : 2615

745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

I hereby certify that this correspondence is being  
deposited with the United States Postal Service as  
first class mail in an envelope addressed to:  
Assistant Commissioner for Patents  
Washington, D.C. 20231, on March 5, 2002

Bruno Polito, Reg. No. 38,580

Name of Applicant, Assignee or  
Registered Representative

  
Signature

March 5, 2002

Date of Signature

CLAIM OF PRIORITY

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

In support of the claim of priority under 35. U.S.C.  
§ 119 asserted in the Declaration accompanying the above-entitled  
application, as filed, please find enclosed herewith certified  
copies of U.K. Application Nos. 0008431.9 and 0008427.7 and  
0008393.1, filed in U.K. on 5 April 2000 and 5 April 2000 and 5  
April 2000, respectively, forming the basis for such claim.


THIS PAGE BLANK (USPTO)

PATENT  
450110-03117

Acknowledgment of the claim of priority and of the  
receipt of said certified copy(s) is requested.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicants

By:   
Bruno Polito  
Reg. No. 38,580  
Tel. (212) 588-0800

Enclosure(s)

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 10 January 2002






**THIS PAGE BLANK (USPTO)**

# Patents Form 1/77

Patents Act 1977  
(Rule 16)


The  
Patent  
Office

0544700 5007419-5 1102246  
P01/77GB 01.03-10000000-1



## Request for a grant of a patent

*(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

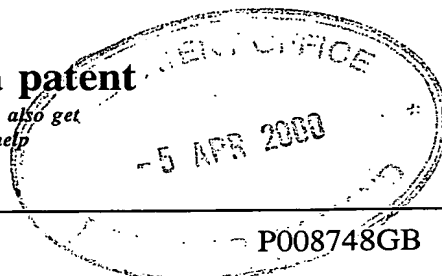

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

P008748GB

2. Patent application number  
(The Patent Office will fill in this part)

0008393.1

5 APR 2000

3. Full name, address and postcode of the or of each applicant  
(underline all surnames)

SONY UNITED KINGDOM LIMITED  
THE HEIGHTS  
BROOKLANDS  
WEYBRIDGE, KT13 0XW

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

6522700003

4. Title of the invention

VIDEO GENERATION APPARATUS AND  
METHOD OF GENERATING VIDEO SIGNALS

5. Name of your agent (if you have one)

D YOUNG & CO

"Address for service" in the United Kingdom to which all correspondence should be sent  
(including the postcode)

21 NEW FETTER LANE  
LONDON  
EC4A 1DA

Patents ADP number (if you have one)

59006

6. If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application  
number  
(if you know it)

Date of filing  
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application

Number of earlier  
application

Date of filing  
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

33

Claims(s)

6

Abstract

1

Drawing(s)

12 + 12 14

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 0

Any other documents 0  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

for D Young & Co  
Agents for the Applicants

05 04 00

12. Name and daytime telephone number of the person to contact in the United Kingdom

DR J M DEVILE

023 8063 4816

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505

b) Write your answers in capital letters using black ink or you may type them


c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you answered 'Yes' Patents Form 7/77 will need to be filed.


e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.





Statement of inventorship and  
of right to grant of a patent

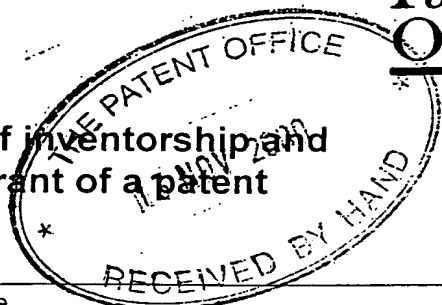

13 NOV 2000

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference P008748GB
2. Patent application number (if you know it) 0008393.1
3. Full name of the or of each applicant SONY UNITED KINGDOM LIMITED
4. Title of the invention VIDEO GENERATION APPARATUS AND METHOD OF GENERATING VIDEO SIGNALS
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent BY VIRTUE OF AN ASSIGNMENT DATED 8 NOVEMBER 2000 BETWEEN OURSELVES AND THE OVERNAMED INVENTOR
6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c))

7. I/We believe that the person(s) named over the page (and on any extra copies of this form(s)) is/are the inventor(s) of the invention which the above patent relates to.

Signature

Date

*D Young & Co*

D YOUNG & CO  
Agents for the Applicants

10 Nov 2000

8. Name and daytime telephone number of person to contact in the United Kingdom 023 8071 9500 Dr Jonathan DeVile

Notes


a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write answers in capital letters using black ink or you may type them.

c) If there are more than three inventor, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.

d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.

e) Once you have filled in the form you must remember to sign and date it.



Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Surname	McGRATH
First Names	MARK JOHN
Address	42 LYDBURY HARMANSWATER BRACKNELL BERKSHIRE RG12 3HH
Patents ADP number (if you know it): 6962849001	

Surname	
First Names	
Address	
Patents ADP number (if you know it):	

Surname	
First Names	
Address	
Patents ADP number (if you know it):	

**Reminder:**  
Have you signed the form?

## **VIDEO GENERATION APPARATUS AND METHOD OF GENERATING VIDEO SIGNALS**

### **Field of the Invention**

The present invention relates to video generation apparatus and methods of  
5 generating video signals.

### **Background of the Invention**

The content of video material generated by a camera is typically stored in a  
form which facilitates a high quality reproduction. In general the quality of the images  
represented by the video signal, to the extent that the images reflect an original image  
10 source falling within the field of view of the camera, is arranged to be as high as  
possible. This means that an amount of information that must be store to represent  
these images is relatively high. This in turn requires that the video signal is stored in a  
format that does not readily allow access to the content of the video signals. This is  
particularly so, if the video signal is compressed in some way. For example video  
15 cameras and camcorders are arranged conventionally to record video signals  
representing the moving images falling within a field of view of the camera on a video  
tape. Once the video signals have been recorded on to the video tape, a user cannot  
determine the content of the video tape without reviewing the entire tape.  
Furthermore, because video tape is an example of a linear recording medium, the task  
20 of navigating through the media to locate particular content items of video material is  
time consuming and labour intensive. As a result during an editing process in which  
selected items from the contents of the video tape are combined in an order which may  
be different to that in which they were recorded, it may be necessary to review the  
entire contents of the video tape in order to identify the selected items.

25 As will be understood from the foregoing discussion access to the content of  
the recorded video material so that a user can navigate through the recorded video  
material remains a technical problem regardless of the recording medium, which may  
be a disc or a tape.

### **Summary of the Invention**

According to an aspect of the present invention there is provided a video generation apparatus which is arranged in operation to generate video signals representative of an image source, the video generation apparatus comprising a recording processor which is arranged in operation to record the video signals on a recording medium, and a metadata generation processor which is arranged in operation to receive the video signals and to generate at least one sample image which is representative of a video image from the recorded video signals, and to associate the sample image with an address on the recording medium at which the video image is recorded.

Once the video material has been captured from a source and recorded on to a recording medium, the recorded material is not in a form in which the content of that material can be easily determined, without having to replay the recorded material. Therefore, by generating a sample image which provides a representation of a video image produced from the recorded video material and storing this sample image separately from the recorded video signals with an address of that video image on the recording medium, a user is provided with an indication of the content of the recorded video signals without having to view the recorded video signals.

A further improvement is provided where the at least one sample image is first and second sample images, the first sample image being generated for a video image at an in point of the at least part of the video signals and the second sample image being generated for a video image at an out point of the at least part of the video signals, and the address is a first and second address, the first address indicating the place on the recording medium at which the in point video image is recorded, and the second address indicating the place on the recording medium at which the out point video image is recorded.

Providing sample images at the in point and the out point of a take provides a facility for an editor to rapidly determine which of a plurality of takes to select and use in the final edited video production.

It will be understood by those skilled in the art that a 'take' is a portion of continuous action captured and recorded by a video camera. Several takes may be generated for a single shot and one or more takes may be selected for each shot. When

recorded, each take has an in and an out point at the point on the tape where the take starts and the point on the tape where the takes end.

Alternatively in a further embodiment, the video generation apparatus is further provided with an activity detector coupled to the metadata generation processor and arranged in operation to receive the video signals and to generate an activity signal indicative of a relative change of content of the video signals, wherein the metadata generation tool is arranged in operation to generate a plurality of sample images, each of which is representative of a video image from the recorded video signals at a different time, the sample images being generated at times of change of content of the video signals indicated by the activity signal, an address of each of the sample images providing the location on the recording medium at which the corresponding video image is recorded. This alternative embodiment provides an indication automatically of the content of the recorded video signal. The sample images are concentrated around points in the video material when the content changes, such as for example when a scene changes. Therefore by increasing an amount of the sample images around places on the recording medium where the content is changing, an editor is provided with a rapid indication of the content of the recorded video signals without having review all the recorded video signals.

The sample images can provide a static representation of the moving video images which facilitates navigation by providing a reference to the content of the moving video images.

In other embodiments of the invention an audio signal is generated with the video signals, and the activity detector generates an activity signal indicative of the start of speech. The metadata generator may further operate to generate data representative of the content of the speech. This may be in the form of text.

As already explained, the video signals may be generated from a plurality of takes each of which correspond to a video material item. As such, the video signals are representative of a plurality of video material items.

In preferred embodiments, the metadata generation processor may be arranged in operation to generate a preference marker, which is associated with selected ones of the video material items in response to commands from a user. An improvement in the efficiency with which a video production may be edited is provided through a facility

for adding a preference marker to the items of video material formed from the takes at acquisition. The preference marker can be used to provide an indication of the items of video material which are preferred from a set of items, which are to be used to form an edited video production. This represents a pre-editing facility, which can be used to  
5 reduce a time taken to form the video production. Furthermore, the metadata generation processor may be arranged in operation to record data representative of the preference marker on the recording medium. The video production may be formed by ingesting and combining only those items of video material from the recording medium which have the preference marker, thereby providing at least a first edited  
10 version of the video production.

Preferably, the video generation apparatus comprises a data store coupled to the metadata generation processor, the at least one sample image and the address being stored in the data store separately from the recording medium. An advantage is provided in storing the sample images separately from the recorded video signal in that  
15 the contents of the recorded video signal can be view using a separate medium. Alternatively the contents can be communicated separately from the recording medium and reviewed separately reducing a time for generating an edited version of the video signals.

In one embodiment, the recording medium is a random access memory, and the  
20 address indicates a place in the memory where the image is recorded. In another embodiment the recording medium is a linear recording medium and the address is a time code corresponding to a place on the recording medium where the image is recorded.

Advantageously in order to reduce an amount of data which must be stored or  
25 communicated, the metadata processor may generate the sample images in accordance with a compression encoding process such as the Joint Photographic Experts Group compression encoding process.

In a preferred embodiment the audio and/or video generation apparatus may be a video camera, camcorder, television camera, cinema camera or the like.

30 The term metadata as used herein refers to and includes any form of information or data which serves to describe either the content of audio/video material or parameters present or used to generate the audio/video material or any other

information associated with the audio/video material. Metadata may be, for example, "semantic metadata" which provides contextual/descriptive information about the actual content of the audio/video material. Examples of semantic metadata are the start of periods of dialogue, changes in a scene, introduction of new faces or face positions within a scene or any other items associated with the source content of the audio/video material. The metadata may also be syntactic metadata which is associated with items of equipment or parameters which were used whilst generating the audio/video material such as, for example, an amount of zoom applied to a camera lens, an aperture and shutter speed setting of the lens, and a time and date when the audio/video material was generated. Although metadata may be recorded with the audio/video material with which it is associated, either on separate parts of a recording medium or on common parts of a recording medium, metadata in the sense used herein is intended for use in navigating and identifying features and essence of the content of the audio/video material, and may, therefore be separated from the audio/video signals when the audio/video signals are reproduced. The metadata is therefore separable from the audio/video signals.

According to an aspect of the present invention, there is provided a metadata generation processor which is arranged in operation to receive video signals being recorded and to generate at least one sample image which is representative of an image from the video signals being recorded, and to associate the sample image with an address on a recording medium at which the image is being recorded.

Various further aspects and features of the present invention are defined in the appended claims.

#### **Brief Description of the Drawings**

Embodiments of the present invention will now be described by way of example with reference to the accompanying drawings wherein:

Figure 1 is a schematic block diagram of a video camera arranged in operative association with a Personal Digital Assistant (PDA),

Figure 2 is a schematic block diagram of parts of the video camera shown in figure 1,

Figure 3 is a pictorial representation providing an example of the form of the PDA shown in figure 1,

Figure 4 is a schematic block diagram of a further example arrangement of parts of a video camera and some of the parts of the video camera associated with generating and processing metadata as a separate acquisition unit associated with a further example PDA,

Figure 5 is a pictorial representation providing an example of the form of the acquisition unit shown in figure 4,

Figure 6 is a part schematic part pictorial representation illustrating an example of the connection between the acquisition unit and the video camera of figure 4,

Figure 7 is a part schematic block diagram of an ingestion processor coupled to a network, part flow diagram illustrating the ingestion of metadata and audio/video material items,

Figure 8 is a pictorial representation of the ingestion processor shown in figure 7,

Figure 9 is a part schematic block diagram part pictorial representation of the ingestion processor shown in figures 7 and 8 shown in more detail,

Figure 10 is a schematic block diagram showing the ingestion processor shown in operative association with the database of figure 7,

Figure 11 is a schematic block diagram showing a further example of the operation of the ingestion processor shown figure 7,

Figure 12a is a schematic representation of the generation of picture stamps at sample times of audio/video material,

Figure 12b is a schematic representation of the generation of text samples with respect to time of the audio/video material,

Figure 13 provides as illustrative representation of an example structure for organising metadata,

Figure 14 is a schematic block diagram illustrating the structure of a data reduced UMID, and

Figure 15 is a schematic block diagram illustrating the structure of an extended UMID.

#### **Description of Preferred Embodiments**



### Acquisition Unit

Embodiments of the present invention relate to audio and/or video generation apparatus which may be for example television cameras, video cameras or camcorders. An embodiment of the present invention will now be described with reference to figure 1 which provides a schematic block diagram of a video camera which is arranged to communicate to a personal digital assistant (PDA). A PDA is an example of a data processor which may be arranged in operation to generate metadata in accordance with a user's requirements. The term personal digital assistant is known to those acquainted with the technical field of consumer electronics as a portable or hand held personal organiser or data processor which include an alpha numeric key pad and a hand writing interface.

In figure 1 a video camera 101 is shown to comprise a camera body 102 which is arranged to receive light from an image source falling within a field of view of an imaging arrangement 104 which may include one or more imaging lenses (not shown). The camera also includes a view finder 106 and an operating control unit 108 from which a user can control the recording of signals representative of the images formed within the field of view of the camera. The camera 101 also includes a microphone 110 which may be a plurality of microphones arranged to record sound in stereo. Also shown in figure 1 is a hand-held PDA 112 which has a screen 114 and an alphanumeric key pad 116 which also includes a portion to allow the user to write characters recognised by the PDA. The PDA 112 is arranged to be connected to the video camera 101 via an interface 118. The interface 118 is arranged in accordance with a predetermined standard format such as, for example an RS232 or the like. The interface 118 may also be effected using infra-red signals, whereby the interface 118 is a wireless communications link. The interface 118 provides a facility for communicating information with the video camera 101. The function and purpose of the PDA 112 will be explained in more detail shortly. However in general the PDA 112 provides a facility for sending and receiving metadata generated using the PDA 112 and which can be recorded with the audio and video signals detected and captured by the video camera 1. A better understanding of the operation of the video camera 101 in combination with the PDA 112 may be gathered from figure 2 which shows a

more detailed representation of the body 102 of the video camera which is shown in figure 1 and in which common parts have the same numerical designations.

In figure 2 the camera body 102 is shown to comprise a tape drive 122 having read/write heads 124 operatively associated with a magnetic recording tape 126. Also shown in figure 2 the camera body includes a metadata generation processor 128 coupled to the tape drive 122 via a connecting channel 130. Also connected to the metadata generation processor 128 is a data store 132, a clock 136 and three sensors 138, 140, 142. The interface unit 118 sends and receives data also shown in figure 2 via a wireless channel 119. Correspondingly two connecting channels for receiving and transmitting data respectively, connect the interface unit 118 to the metadata generation processor 128 via corresponding connecting channels 148 and 150. The metadata generation processor is also shown to receive via a connecting channel 151 the audio/video signals generated by the camera. The audio/video signals are also fed to the tape drive 122 to be recorded on to the tape 126.

The video camera 110 shown in figure 1 operates to record visual information falling within the field of view of the lens arrangement 104 onto a recording medium. The visual information is converted by the camera into video signals. In combination, the visual images are recorded as video signals with accompanying sound which is detected by the microphone 101 and arranged to be recorded as audio signals on the recording medium with the video signals. As shown in figure 2, the recording medium is a magnetic tape 126 which is arranged to record the audio and video signals onto the recording tape 126 by the read/write heads 124. The arrangement by which the video signals and the audio signals are recorded by the read/write heads 124 onto the magnetic tape 126 is not shown in figure 2 and will not be further described as this does not provide any greater illustration of the example embodiment of the present invention. However once a user has captured visual images and recorded these images using the magnetic tape 126 as with the accompanying audio signals, metadata describing the content of the audio/video signals may be input using the PDA 112. As will be explained shortly this metadata can be information that identifies the audio/video signals in association with a pre-planned event, such as a 'take'. As shown in figure 2 the interface unit 118 provides a facility whereby the metadata added by the user using the PDA 112 may be received within the camera body 102.

Data signals may be received via the wireless channel 119 at the interface unit 118. The interface unit 118 serves to convert these signals into a form in which they can be processed by the acquisition processor 128 which receives these data signals via the connecting channels 148, 150.

5           Metadata is generated automatically by the metadata generation processor 128 in association with the audio/video signals which are received via the connecting channel 151. In the example embodiment illustrated in figure 2, the metadata generation processor 128 operates to generate time codes with reference to the clock 136, and to write these time codes on to the tape 126 in a linear recording track  
10       provided for this purpose. The time codes are formed by the metadata generation processor 128 from the clock 136. Furthermore, the metadata generation processor 128 forms other metadata automatically such as a UMID, which identifies uniquely the audio/video signals. The metadata generation processor may operate in combination with the tape driver 124, to write the UMID on to the tape with the audio/video  
15       signals.

In an alternative embodiment, the UMID, as well as other metadata may be stored in the data store 132 and communicated separately from the tape 126. In this case, a tape ID is generated by the metadata generation processor 128 and written on to the tape 126, to identify the tape 126 from other tapes.

20           In order to generate the UMID, and other metadata identifying the contents of the audio/video signals, the metadata generation processor 128 is arranged in operation to receive signals from other sensor 138, 140, 142, as well as the clock 136. The metadata generation processor therefore operates to co-ordinate these signals and provides the metadata generation processor with metadata such as the aperture setting  
25       of the camera lens 104, the shutter speed and a signal received via the control unit 108 to indicate that the visual images captured are a "good shot". These signals and data are generated by the sensors 138, 140, 142 and received at the metadata generation processor 128. The metadata generation processor in the example embodiment is arranged to produce syntactic metadata which provides operating parameters which are  
30       used by the camera in generating the video signals. Furthermore the metadata generation processor 128 monitors the status of the camcorder 101, and in particular whether audio/video signals are being recorded by the tape drive 124. When

RECORD START is detected the IN POINT time code is captured and a UMID is generated in correspondence with the IN POINT time code. Furthermore in some embodiments an extended UMID is generated, in which case the metadata generation processor is arranged to receive spatial co-ordinates which are representative of the location at which the audio/video signals are acquired. The spatial co-ordinates may be generated by a receiver which operates in accordance with the Global Positioning System (GPS). The receiver may be external to the camera, or may be embodied within the camera body 102.

When RECORD START is detected, the OUT POINT time code is captured by the metadata generation processor 128. As explained above, it is possible to generate a "good shot" marker. The "good shot" marker is generated during the recording process, and detected by the metadata generation processor. The "good shot" marker is then either stored on the tape, or within the data store 132, with the corresponding IN POINT and OUT POINT time codes.

As already indicated above, the PDA 112 is used to facilitate identification of the audio/video material generated by the camera. To this end, the PDA is arranged to associate this audio/video material with pre-planned events such as scenes, shots or takes. The camera and PDA shown in figures 1 and 2 form part of an integrated system for planning, acquiring, editing an audio/video production. During a planning phase, the scenes which are required in order to produce an audio/video production are identified. Furthermore for each scene a number of shots are identified which are required in order to establish the scene. Within each shot, a number of takes may be generated and from these takes a selected number may be used to form the shot for the final edit. The planning information in this form is therefore identified at a planning stage. Data representing or identifying each of the planned scenes and shots is therefore loaded into the PDA 112 along with notes which will assist the director when the audio/video material is captured. An example of such data is shown in the table below.

A/V Production	News story: BMW disposes of Rover
Scene ID: 900015689	Outside Longbridge
Shot 5000000199	Longbridge BMW Sign

Shot 5000000200	Workers Leaving shift
Shot 5000000201	Workers in car park
Scene ID: 900015690	BMW HQ Munich
Shot 5000000202	Press conference
Shot 5000000203	Outside BMW building
Scene ID: 900015691	Interview with minister
Shot 5000000204	Interview

In the first column of the table below the event which will be captured by the camera and for which audio/video material will be generated is shown. Each of the events which is defined in a hierarchy is provided with an identification number.

5 Correspondingly, in the second column notes are provided in order to direct or remind the director of the content of the planned shot or scene. For example, in the first row the audio/video production is identified as being a news story, reporting the disposal of Rover by BMW. In the extract of the planning information shown in the table below, there are three scenes, each of which is provided with a unique identification number.

10 Each of these scenes are "Outside Long Bridge", "BMW HQ Munich" and "Interview with Minister". Correspondingly for each scene a number of shots are identified and these are shown below each of the scenes with a unique shot identification number. Notes corresponding to the content of each of these shots are also entered in the second column. So, for example, for the first scene "Outside Long Bridge", three shots are

15 identified which are "Long Bridge BMW", "Workers leaving shift" and "Workers in car park". With this information loaded onto the PDA, the director or indeed a single camera man may take the PDA out to the place where the new story is to be shot, so that the planned audio/video material can be gathered. An illustration of the form of the PDA with the graphical user interface displaying this information is shown in

20 figure 3.

As indicated in figure 1, the PDA 112 is arranged to communicate data to the camera 111. To this end the metadata generation processor 128 is arranged to communicate data with the PDA 112 via the interface 118. The interface 118 maybe for example an infra-red link 119 providing wireless communications in accordance

with a known standard. The PDA and the parts of the camera associated with generating metadata which are shown in figure 2 are shown in more detail in figure 4.

In figure 4 the parts of the camera which are associated with generating metadata and communicating with the PDA 112 are shown in a separate acquisition unit 152. However it will be appreciated that the acquisition unit 152 could also be embodied within the camera 102. The acquisition unit 152 comprises the metadata generation processor 128, and the data store 132. The acquisition processor 152 also includes the clock 136 and the sensors 138, 140, 142 although for clarity these are not shown in figure 4. Alternatively, some or all of these features which are shown in figure 2 will be embodied within the camera 102 and the signals which are required to define the metadata such as the time codes and the audio/video signals themselves may be communicated via a communications link 153 which is coupled to an interface port 154. The metadata generation processor 128 is therefore provided with access to the time codes and the audio/video material as well as other parameters used in generating the audio/video material. Signals representing the time codes and parameters as well as the audio/video signals are received from the interface port 154 via the interface channel 156. The acquisition unit 152 is also provided with a screen (not shown) which is driven by a screen driver 158. Also shown in figure 4 the acquisition unit is provided with a communications processor 160 which is coupled to the metadata generation processor 128 via a connecting channel 162. Communications is effected by the communications processor 160 via a radio frequency communications channel using the antennae 164. A pictorial representation of the acquisition unit 152 is shown in figure 5.

The PDA 112 is also shown in figure 4. The PDA 112 is correspondingly provided with an infra-red communications port 165 for communicating data to and from the acquisition unit 152 via an infra-red link 119. A data processor 166 within the PDA 112 is arranged to communicate data to and from the infra-red port 165 via a connecting channel 166. The PDA 112 is also provided with a data store 167 and a screen driver 168 which are connected to the data processor 166.

The pictorial representation of the PDA 112 shown in figure 3 and the acquisition unit shown in figure 5 provide an illustration of an example embodiment of the present invention. A schematic diagram illustrating the arrangement and

connection of the PDA 112 and the acquisition unit 152 is shown in figure 6. In the example shown in figure 6 the acquisition unit 152 is mounted on the back of a camera 101 and coupled to the camera via a six pin remote connector and to a connecting channel conveying the external signal representative of the time code recorded onto the recording tape. Thus, the six pin remote connector and the time code indicated as arrow lines form the communications channel 153 shown in figure 4. The interface port 154 is shown in figure 6 to be a VA to DN1 conversion comprising an RM-P9/LTC to RS422 converter 154. RM-P9 is a camera remote control protocol, whereas LTC is Linear Time Code in the form of an analogue signal. This is arranged to communicate with a RS422 to RS232 converter 154'' via a connecting channel which forms part of the interface port 154. The converter 154'' then communicates with the metadata generation processor 128 via the connecting channel 156 which operates in accordance with the RS 232 standard.

Returning to figure 4, the PDA 112 which has been loaded with the pre-planned production information is arranged to communicate the current scene and shot for which audio/video material is to be generated by communicating the next shot ID number via the infra-red link 119. The pre-planned information may also have been communicated to the acquisition unit 152 and stored in the data store 132 via a separate link or via the infra-red communication link 119. However in effect the acquisition unit 152 is directed to generate metadata in association with the scene or shot ID number which is currently being taken. After receiving the information of the current shot the camera 102 is then operated to make a "take of the shot". The audio/video material of the take is recorded onto the recording tape 126 with corresponding time codes. These time codes are received along with the audio/video material via the interface port 154 at the metadata generation processor 128. The metadata generation processor 128 having been informed of the current pre-planned shot now being taken logs the time codes for each take of the shot. The metadata generation processor therefore logs the IN and OUT time codes of each take and stores these in the data store 132.

The information generated and logged by the metadata generation processor 128 is shown in the table below. In the first column the scene and shot are identified with the corresponding ID numbers, and for each shot several takes are made by the

camera operator which are indicated in a hierarchical fashion. Thus, having received information from the PDA 112 of the current shot, each take made by the camera operator is logged by the metadata generation processor 128 and the IN and OUT points for this take are shown in the second and third columns and stored in the data store 132. This information may also be displayed on the screen of the acquisition unit 152 as shown in figure 5. Furthermore, the metadata generation processor 128 as already explained generates the UMID for each take for the audio/video material generated during the take. The UMID for each take forms the fourth column of the table. Additionally, in some embodiments, to provide a unique identification of the tape once which the material is recorded, a tape identification is generated and associated with the metadata. The tape identification may be written on to the tape, or stored on a random access memory chip which is embodied within the video tape cassette body. This random access memory chip is known as a TELEFILE (RTM) system which provides a facility for reading the tape ID number remotely. The tape ID is written onto the magnetic tape 126 to uniquely identify this tape. In preferred embodiments the TELEFILE (RTM) system is provided with a unique number which manufactured as part of the memory and so can be used as the tape ID number. In other embodiments the TELEFILE (RTM) system provides automatically the IN/OUT time codes of the recorded audio/video material items.

In one embodiment the information shown in the table below is arranged to be recorded onto the magnetic tape in a separate recording channel. However, in other embodiments the metadata shown in the table is communicated separately from the tape 126 using either the communications processor 160 or the infra-red link 119. The metadata maybe received by the PDA 112 for analysis and may be further communicated by the PDA.

Scene ID: 900015689	Tape ID: 00001		UMID:
Shot 5000000199			
Take 1	IN: 00:03:45:29	OUT: 00:04:21:05	060C23B340..
Take 2	IN: 00:04:21:20	OUT: 00:04:28:15	060C23B340..
Take 3	IN: 00:04:28:20	OUT: 00:05:44:05	060C23B340..
Shot 5000000200			



Take 1	IN: 00:05:44:10	OUT: 00:08:22:05	060C23B340..
Take 2	IN: 00:08:22:10	OUT: 00:08:23:05	060C23B340..

The communications processor 160 may be arranged in operation to transmit the metadata generated by the metadata generation processor 128 via a wireless communications link. The metadata maybe received via the wireless communications link by a remotely located studio which can then acquire the metadata and process this metadata ahead of the audio/video material recorded onto the magnetic tape 126. This provides an advantage in improving the rate at which the audio/video production may be generated during the post production phase in which the material is edited.

A further advantageous feature provided by embodiments of the present invention is an arrangement in which a picture stamp is generated at certain temporal positions within the recorded audio/video signals. A picture stamp is known to those skilled in the art as being a digital representation of an image and in the present example embodiment is generated from the moving video material generated by the camera. The picture stamp may be of lower quality in order to reduce an amount of data required to represent the image from the video signals. Therefore the picture stamp may be compression encoded which may result in a reduction in quality. However a picture stamp provides a visual indication of the content of the audio/video material and therefore is a valuable item of metadata. Thus, the picture stamp may for example be generated at the IN and OUT time codes of a particular take. Thus, the picture stamps may be associated with the metadata generated by the metadata generation processor 128 and stored in the data store 132. The picture stamps are therefore associated with items of metadata such as, for example, the time codes which identify the place on the tape where the image represented by the picture stamp is recorded. The picture stamps may be generated with the "Good Shot" markers. The picture stamps are generated by the metadata generation processor 128 from the audio/video signals received via the communications link 153. The metadata generation processor therefore operates to effect a data sampling and compression encoding process in order to produce the picture stamps. Once the picture stamps have been generated they can be used for several purposes. They may be stored in a data

file and communicated separately from the tape 126, or they may be stored on the tape 126 in compressed form in a separate recording channel. Alternatively in preferred embodiments picture stamps may be communicated using the communications processor 160 to the remotely located studio where a producer may analysis the picture stamps. This provides the producer with an indication as to whether the audio/video material generated by the camera operator is in accordance with what is required.

In a yet further embodiment, the picture stamps are communicated to the PDA 112 and displayed on the PDA screen. This may be effected via the infra-red port 119 or the PDA may be provided with a further wireless link which can communicate with the communications processor 160. In this way a director having the hand held PDA 112 is provided with an indication of the current audio/video content generated by the camera. This provides an immediate indication of the artist and aesthetic quality of the audio/video material currently being generated. As already explained the picture stamps are compression encoded so that they may be rapidly communicated to the PDA.

A further advantage of the acquisition unit 152 shown in figure 4 is that the editing process is made more efficient by providing the editor at a remotely located studio with an indication of the content of the audio/video material in advance of receiving that material. This is because the picture stamps are communication with the metadata via a wireless link so that the editor is provided with an indication of the content of the audio/video material in advance of receiving the audio/video material itself. In this way the bandwidth of the audio/video material can remain high with a correspondingly high quality whilst the metadata and picture stamps are at a relatively low band width providing relatively low quality information. As a result of the low band width the metadata and picture stamps may be communicated via a wireless link on a considerably lower band width channel. This facilitates rapid communication of the metadata describing content of the audio/video material.

The picture stamps generated by the metadata generation processor 128 can be at any point during the recorded audio/video material. In one embodiment the picture stamps are generated at the IN and OUT points of each take. However in other embodiments of the present invention as an activity processor 170 is arranged to detect relative activity within the video material. This is effected by performing a process in

which a histogram of the colour components of the images represented by the video signal is compiled and the rate of change of the colour components determined and changes in these colour components used to indicate activity within the image. Alternatively or in addition, motion vectors within the image are used to indicate activity. The activity processor 176 then operates to generate a signal indicative of the relative activity within the video material. The metadata generation processor 128 then operates in response to the activity signal to generate picture stamps such more picture stamps are generated for greater activity within the images represented by the video signals.

10 In an alternative embodiment of the present invention the activity processor 170 is arranged to receive the audio signals via the connecting channel 172 and to recognise speech within the audio signals. The activity processor 170 then generates content data representative of the content of this speech as text. The text data is then communicated to the data processor 128 which may be stored in the data store 132 or  
15 communicated with other metadata via the communications processor 160 in a similar way to that already explained for the picture stamps.

Figure 7 provides a schematic representation of a post production process in which the audio/video material is edited to produce an audio/video program. As shown in figure 7 the metadata, which may include picture stamps and/or the speech  
20 content information is communicated from the acquisition unit 152 via a separate route represented by a broken line 174, to a metadata database 176. The route 174 may be representative of a wireless communications link formed by for example UMTS, GSM or the like.

The database 176 stores metadata to be associated with the audio/video  
25 material. The audio/video material in high quality form is recorded onto the tape 126. Thus the tape 126 is transported back to the editing suite where it is ingested by an ingestion processor 178. The tape identification (tape ID) recorded onto the tape 126 or other metadata providing an indication of the content of the audio/video material is used to associate the metadata stored in the data store 176 with the audio/video  
30 material on the tape as indicated by the broken line 180.

As will be appreciated although the example embodiment of the present invention uses a video tape as the recording medium for storing the audio/video

signals, it will be understood that alternative recording medium such as magnetic disks and random access memories may also be used.

### Ingestion Processor

Figure 7 provides a schematic representation of a post production process in which the audio/video material is edited to produce an audio/video program. As shown in figure 7 the metadata, which may include picture stamps and/or the speech content information is communicated from the acquisition unit 152 via a separate route represented by a broken line 174, to a metadata database 176. The route 174 may be representative of a wireless communications link formed by for example UMTS, GSM or the like.

The database 176 stores metadata to be associated with the audio/video material. The audio/video material in high quality form is recorded onto the tape 126. Thus the tape 126 is transported back to the editing suite where it is ingested by an ingestion processor 178. The tape identification (tape ID) recorded onto the tape 126 or other metadata providing an indication of the content of the audio/video material is used to associate the metadata stored in the data store 176 with the audio/video material on the tape as indicated by the broken line 180.

The ingestion processor 178 is also shown in Figure 7 to be connected to a network formed from a communications channel represented by a connecting line 182. The connecting line 182 represents a communications channel for communicating data to items of equipment, which form an inter-connected network. To this end, these items of equipment are provided with a network card which may operate in accordance with a known access technique such as Ethernet, RS422 and the like. Furthermore, as will be explained shortly, the communications network 182 may also provide data communications in accordance with the Serial Digital Interface (SDI) or the Serial Digital Transport Interface (SDTI).

Also shown connected to the communications network 182 is the metadata database 176, and an audio/video server 190, into which the audio/video material is ingested. Furthermore, editing terminals 184, 186 are also connected to the communications channel 182 along with a digital multi-effects processor 188.

The communications network 182 provides access to the audio/video material present on tapes, discs or other recording media which are loaded into the ingestion processor 178.

5 The metadata database 176 is arranged to receive metadata via the route 174 describing the content of the audio/video material recorded on to the recording media loaded into the ingestion processor 178.

As will be appreciated although in the example embodiment a video tape has been used as the recording medium for storing the audio/video signals, it will be understood that alternative recording media such as magnetic disks and random access  
10 memories may also be used, and that video tape is provided as an illustrative example only.

The editing terminals 184, 186 digital multi-effects processor 188 are provided with access to the audio/video material recorded on to the tapes loaded into the ingestion processor 178 and the metadata describing this audio/video material stored in  
15 the metadata database 176 via the communications network 182. The operation of the ingestion processor with 178 in combination with the metadata database 176 will now be described in more detail.

Figure 8 provides an example representation of the ingestion processor 178. In Figure 8 the ingestion processor 178 is shown to have a jog shuttle control 200 for  
20 navigating through the audio/video material recorded on the tapes loaded into video tape recorders/reproducers forming part of the ingestion processor 178. The ingestion processor 178 also includes a display screen 202 which is arranged to display picture stamps which describe selected parts of the audio/video material. The display screen 202 also acts as a touch screen providing a user with the facility for selecting the  
25 audio/video material by touch. The ingestion processor 178 is also arranged to display all types of metadata on the screen 202 which includes script, camera type, lens types and UMIDs.

As shown in Figure 9, the ingestion processor 178 may include a plurality of video tape recorders/reproducers into which the video tapes onto which the  
30 audio/video material is recorded may be loaded in parallel. In the example shown in figure 9, the video tape recorders 204 are connected to the ingestion processor 178 via an RS422 link and an SDI IN/OUT link. The ingestion processor 178 therefore

represents a data processor which can access any of the video tape recorders 204 in order to reproduce the audio/video material from the video tapes loaded into the video tape recorders. Furthermore, the ingestion processor 178 is provided with a network card in order to access the communications network 182. As will be appreciated from Figure 9 however, the communications channel 182 is comprised of a relatively low band width data communications channel 182' and a high band width SDI channel 182'' for use in streaming video data. Correspondingly, therefore the ingestion processor 178 is connected to the video tape recorders 204 via an RS422 link in order to communicate requests for corresponding items of audio/video material. Having requested these items of audio/video material, the audio/video material is communicated back to the ingestion processor 178 via an SDI communication link 206 for distribution via the SDI network. The requests may for example include the UMID which uniquely identifies the audio/video material item(s).

The operation of the ingestion processor in association with the metadata database 176 will now be explained with reference to figure 10. In figure 10 the metadata database 176 is shown to include a number of items of metadata 210 associated with a particular tape ID 212. As shown by the broken line headed arrow 214, the tape ID 212 identifies a particular video tape 216, on which the audio/video material corresponding to the metadata 210 is recorded. In the example embodiment shown in Figure 10, the tape ID 212 is written onto the video tape 218 in the linear time code area 220. However it will be appreciated that in other embodiments, the tape ID could be written in other places such as the vertical blanking portion. The video tape 216 is loaded into one of the video tape recorders 204 forming part of the ingestion processor 178.

In operation one of the editing terminals 184 is arranged to access the metadata database 176 via the low band width communications channel 182' the editing terminal 184 is therefore provided with access to the metadata 210 describing the content of the audio/video material recorded onto the tape 216. The metadata 210 may include such as the copyright owner "BSkyB", the resolution of the picture and the format in which the video material is encoded, the name of the program, which is in this case "Grandstand", and information such as the date, time and audience. Metadata may further include a note of the content of the audio/video material.

Each of the items of audio/video material is associated with a UMID, which identifies the audio/video material. As such, the editing terminal 184 can be used to identify and select from the metadata 210 the items of audio/video material which are required in order to produce a program. This material may be identified by the UMID associated with the material. In order to access the audio/video material to produce the program, the editing terminal 184 communicates a request for this material via the low band width communications network 182. The request includes the UMID or the UMIDs identifying the audio/video material item(s). In response to the request for audio/video material received from the editing terminal 184, the ingestion processor 178 is arranged to reproduce selectively these audio/video material items identified by the UMID or UMIDs from the video tape recorder into which the video cassette 216 is loaded. This audio/video material is then streamed via the SDI network 182'' back to the editing terminal 184 to be incorporated into the audio/video production being edited. The streamed audio/video material is ingested into the audio/video server 190 from where the audio/video can be stored and reproduced.

Figure 11 provides an alternative arrangement in which the metadata 210 is recorded onto a suitable recording medium with the audio/video material. For example the metadata 210 could be recorded in one of the audio tracks of the video tape 218'. Alternatively, the recording medium may be an optical disc or magnetic disc allowing random access and providing a greater capacity for storing data. In this case the metadata 210 may be stored with the audio/video material.

In a yet further arrangement, some or all of the metadata may be recorded onto the tape 216. This may be recorded, for example, into the linear recording track of the tape 218. Some metadata related to the metadata recorded onto the tape may be conveyed separately and stored in the database 176. A further step is required in order to ingest the metadata and to this end the ingestion processor 178 is arranged to read the metadata from the recording medium 218' and convey the metadata via the communications network 182' to the metadata database 176. Therefore, it will be appreciated that the metadata associated with the audio/video material to be ingested by the ingestion processor 178 may be ingested into the database 176 via a separate medium or via the recording medium on which the audio/video material is also recorded.

The metadata associated with the audio/video material may also include picture stamps which represent low quality representations of the images at various points throughout the video material. These may be presented at the touch screen 202 on the ingestion processor 178. Furthermore these picture stamps may be conveyed via the network 182' to the editing terminals 184, 186 or the effects processor 188 to provide an indication of the content of the audio/video material. The editor is therefore provided with a pictorial representation for the audio/video material and from this a selection of an audio/video material items may be made. Furthermore, the picture stamp may stored in the database 176 as part of the metadata 210. The editor may therefore retrieve a selected item for the corresponding picture stamp using the UMID which is associated with the picture stamp.

In other embodiments of the invention, the recording medium may not have sufficient capacity to include picture stamps recorded with the audio/video material. This is likely to be so if the recording medium is a video tape 216. It is particularly appropriate in this case, although not exclusively so, to generate picture stamps before or during ingestion of the audio/video material.

Returning to figure 7, in other embodiments, the ingestion processor 178 may include a pre-processing unit. The pre-processing unit embodied within the ingestion processor 178 is arranged to receive the audio/video material recorded onto the recording medium which, in the present example is a video tape 126. To this end, the pre-processing unit may be provided with a separate video recorder/reproducer or may be combined with the video tape recorder/reproducer which forms part of the ingestion processor 178. The pre-processing unit generates picture stamps associated with the audio/video material. As explained above, the picture stamps are used to provide a pictorial representation of the content of the audio/video material items. However in accordance with a further embodiment of the present invention the pre-processing unit operates to process the audio/video material and generate an activity indicator representative of relative activity within the content of the audio/video material. This may be achieved for example using a processor which operates to generate an activity signal in accordance with a histogram of colour components within the images represented by the video signal and to generate the activity signals in accordance with a rate of change of the colour histogram components. The pre-processing unit then



operates to generate a picture stamp at points throughout the video material where there are periods of activity indicated by the activity signal. This is represented in Figure 12. In Figure 12A picture stamps 224 are shown to be generated along a line 226 which is representing time within the video signal. As shown in figure 12A the picture stamps 224 are generated at times along the time line 226 where the activity signal represented as arrows 228 indicates events of activity. This might be for example someone walking into and out of the field of view of the camera where there is a great deal of motion represented by the video signal. To this end, the activity signal may also be generated using motion vectors which may be, for example, the motion vectors generated in accordance with the MPEG standard.

In other embodiments of the invention, the pre-processor may generate textual information corresponding to speech present within the audio signal forming part of the audio/video material items stored on the tape 126. The textual information may be generated instead of the picture stamps or in addition to the picture stamps. In this case, text may be generated for example for the first words of sentences and/or the first activity of a speaker. This is detected from the audio signals present on the tape recording or forming part of the audio/video material. The start points where text is to be generated is represented along the time line 226 as arrows 230. Alternatively the text could be generated at the end of sentences or indeed at other points of interest within the speech.

At the detected start of the speech, a speech processor operates to generate a textual representation of the content of the speech. To this end, the time line 226 shown in Figure 12B is shown to include the text 232 corresponding to the content of the speech at the start of activity periods of speech.

The picture stamps and textual representation of the speech activity generated by the pre-processor is communicated via the communications channel 182 to the metadata database 176 and stored. The picture stamps and text are stored in association with the UMID identifying the corresponding items of audio/video material from which the picture stamps 224 and the textual information 232 were generated. This therefore provides a facility to an editor operating one of the editing terminals 184, 186 to analyse the content of the audio/video material before it is ingested using the ingestion processor 178. As such the video tape 126 is loaded into

the ingestion processor 178 and thereafter the audio/video material can be accessed via the network communications channel 182. The editor is therefore provided with an indication, very rapidly, of the content of the audio/video material and so may ingest only those parts of the material, which are relevant to the particular material items required by the editor. This has a particular advantage in improving the efficiency with which the editor may produce an audio/video production.

In an alternative embodiment, the pre-processor may be a separate unit and may be provided with a screen on which the picture stamps and/or text information are displayed, and a means such as, for example, a touch screen, to provide a facility for selecting the audio/video material items to be ingested.

In a further embodiment of the invention, the ingestion processor 178 generates metadata items such as UMIDs whilst the audio/video material is being ingested. This may be required because the acquisition unit in the camera 152 is not arranged to generate UMIDs, but does generate a Unique Material Reference Number (MURN). The MURN is generated for each material item, such as a take. The MURN is arranged to be considerably shorter than a UMID and can therefore be accommodated within the linear time code of a video tape, which is more difficult for UMIDs because these are larger. Alternatively the MURN may be written into a TELEFILE (RTM) label of the tape. The MURN provides a unique identification of the audio/video material items present on the tape. The MURNs may be communicated separately to the database 176 as indicated by the line 174.

At the ingestion processor 178, the MURN for the material items are recovered from the tape or the TELEFILE label. For each MURN, the ingestion processor 178 operates to generate a UMID corresponding to the MURN. The UMIDs are then communicated with the MURN to the database 176, and are ingested into the database in association with the MURNs, which may be already present within the database 176.

#### **Camera Metadata**

The following is provided, by way of example, to illustrate the possible types of metadata generated during the production of a programme, and one possible organisational approach to structuring that metadata.

Figure 13 illustrates an example structure for organising metadata. A number of tables each comprising a number of fields containing metadata are provided. The tables may be associated with each other by way of common fields within the respective tables, thereby providing a relational structure. Also, the structure may  
5 comprise a number of instances of the same table to represent multiple instances of the object that the table may represent. The fields may be formatted in a predetermined manner. The size of the fields may also be predetermined. Example sizes include “Int” which represents 2 bytes, “Long Int” which represents 4 bytes and “Double” which represents 8 bytes. Alternatively, the size of the fields may be defined with  
10 reference to the number of characters to be held within the field such as, for example, 8, 10, 16, 32, 128, and 255 characters.

Turning to the structure in more detail, there is provided a Programme Table. The Programme Table comprises a number of fields including Programme ID (PID), Title, Working Title, Genre ID, Synopsis, Aspect Ratio, Director ID and Picturestamp.  
15 Associated with the Programme Table is a Genre Table, a Keywords Table, a Script Table, a People Table, a Schedule Table and a plurality of Media Object Tables.

The Genre Table comprises a number of fields including Genre ID, which is associated with the Genre ID field of the Programme Table, and Genre Description.

The Keywords Table comprises a number of fields including Programme ID,  
20 which is associated with the Programme ID field of the Programme Table, Keyword ID and Keyword.

The Script Table comprises a number of fields including Script ID, Script Name, Script Type, Document Format, Path, Creation Date, Original Author, Version, Last Modified, Modified By, PID associated with Programme ID and Notes. The  
25 People Table comprises a number of fields including Image.

The People Table is associated with a number of Individual Tables and a number of Group Tables. Each Individual Table comprises a number of fields including Image. Each Group Table comprises a number of fields including Image. Each Individual Table is associated with either a Production Staff Table or a Cast  
30 Table.

The Production Staff Table comprises a number of fields including Production Staff ID, Surname, Firstname, Contract ID, Agent, Agency ID, E-mail, Address, Phone

Number, Role ID, Notes, Allergies, DOB, National Insurance Number and Bank ID and Picture Stamp.

The Cast Table comprises a number of fields including Cast ID, Surname, Firstname, Character Name, Contract ID, Agent, Agency ID, Equity Number, E-mail, Address, Phone Number, DOB and Bank ID and Picture Stamp. Associated with the Production Staff Table and Cast Table are a Bank Details Table and an Agency Table.

The Bank Details Table comprises a number of fields including Bank ID, which is associated with the Bank ID field of the Production Staff Table and the Bank ID field of the Cast Table, Sort Code, Account Number and Account Name.

The Agency Table comprises a number of fields including Agency ID, which is associated with the Agency ID field of the Production Staff Table and the Agency ID field of the Cast Table, Name, Address, Phone Number, Web Site and E-mail and a Picture Stamp. Also associated with the Production Staff Table is a Role Table.

The Role Table comprises a number of fields including Role ID, which is associated with the Role ID field of the Production Staff Table, Function and Notes and a Picture Stamp. Each Group Table is associated with an Organisation Table.

The Organisation Table comprises a number fields including Organisation ID, Name, Type, Address, Contract ID, Contact Name, Contact Phone Number and Web Site and a Picture Stamp.

Each Media Object Table comprises a number of fields including Media Object ID, Name, Description, Picturestamp, PID, Format, schedule ID, script ID and Master ID. Associated with each Media Object Table is the People Table, a Master Table, a Schedule Table, a Storyboard Table, a script table and a number of Shot Tables.

The Master Table comprises a number of fields including Master ID, which is associated with the Master ID field of the Media Object Table, Title, Basic UMID, EDL ID, Tape ID and Duration and a Picture Stamp.

The Schedule Table comprises a number of fields including Schedule ID, Schedule Name, Document Format, Path, Creation Date, Original Author, Start Date, End Date, Version, Last Modified, Modified By and Notes and PID which is associated with the programme ID.

The contract table contains: a contract ID which is associated with the contract ID of the Production staff, cast, and organisation tables; commencement date, rate, job title, expiry date and details.

5       The Storyboard Table comprises a number of fields including Storyboard ID, which is associated with the Storyboard ID of the shot Table, Description, Author, Path and Media ID.

Each Shot Table comprises a number of fields including Shot ID, PID, Media ID, Title, Location ID, Notes, Picturestamp, script ID, schedule ID, and description. Associated with each Shot Table is the People Table, the Schedule Table, script table,  
10       a Location Table and a number of Take Tables.

The Location Table comprises a number of fields including Location ID, which is associated with the Location ID field of the Shot Table, GPS, Address, Description, Name, Cost Per Hour, Directions, Contact Name, Contact Address and Contact Phone Number and a Picture Stamp.

15       Each Take Table comprises a number of fields including Basic UMID, Take Number, Shot ID, Media ID, Timecode IN, Timecode OUT, Sign Metadata, Tape ID, Camera ID, Head Hours, Videographer, IN Stamp, OUT Stamp. Lens ID, AUTOID ingest ID and Notes. Associated with each Take Table is a Tape Table, a Task Table, a Camera Table, a lens table, an ingest table and a number of Take Annotation Tables.

20       The Ingest table contains an Ingest ID which is associated with the Ingest Id in the take table and a description.

The Tape Table comprises a number of fields including Tape ID, which is associated with the Tape ID field of the Take Table, PID, Format, Max Duration, First Usage, Max Erasures, Current Erasure, ETA ( estimated time of arrival) and Last  
25       Erasure Date and a Picture Stamp.

The Task Table comprises a number of fields including Task ID, PID, Media ID, Shot ID, which are associated with the Media ID and Shot ID fields respectively of the Take Table, Title, Task Notes, Distribution List and CC List. Associated with the Task Table is a Planned Shot Table.

30       The Planned Shot Table comprises a number of fields including Planned Shot ID, PID, Media ID, Shot ID, which are associated with the PID, Media ID and Shot ID

respectively of the Task Table, Director, Shot Title, Location, Notes, Description, Videographer, Due date, Programme title, media title Aspect Ratio and Format.

The Camera Table comprises a number of fields including Camera ID, which is associated with the Camera ID field of the Take Table, Manufacturer, Model, Format, Serial Number, Head Hours, Lens ID, Notes, Contact Name, Contact Address and Contact Phone Number and a Picture Stamp.

The Lens Table comprises a number of fields including Lens ID, which is associated with the Lens ID field of the Take Table, Manufacturer, Model, Serial Number, Contact Name, Contact Address and Contact Phone Number and a Picture Stamp.

Each Take Annotation Table comprises a number of fields including Take Annotation ID, Basic UMID, Timecode, Shutter Speed, Iris, Zoom, Gamma, Shot Marker ID, Filter Wheel, Detail and Gain. Associated with each Take Annotation Table is a Shot Marker Table.

The Shot Marker Table comprises a number of fields including Shot Marker ID, which is associated with the Shot Marker ID of the Take Annotation Table, and Description.

### **UMID Description**

A UMID is described in SMPTE Journal March 2000 which provides details of the UMID standard. Referring to figures 14 and 15, a basic and an extended UMID are shown. It comprises a first set of 32 bytes of basic UMID and a second set of 32 bytes of signature metadata.

The first set of 32 bytes is the basic UMID. The components are:

- A 12-byte Universal Label to identify this as a SMPTE UMID. It defines the type of material which the UMID identifies and also defines the methods by which the globally unique Material and locally unique Instance numbers are created.
- A 1-byte length value to define the length of the remaining part of the UMID.
- A 3-byte Instance number which is used to distinguish between different 'instances' of material with the same Material number.
- A 16-byte Material number which is used to identify each clip. Each Material number is the same for related instances of the same material.

The second set of 32 bytes of the signature metadata as a set of packed metadata items used to create an extended UMID. The extended UMID comprises the basic UMID followed immediately by signature metadata which comprises:

- An 8-byte time/date code identifying the time and date of the Content Unit creation.
- A 12-byte value which defines the spatial co-ordinates at the time of Content Unit creation.
- 3 groups of 4-byte codes which register the country, organisation and user codes

Each component of the basic and extended UMIDs will now be defined in turn.

#### **The 12-byte Universal Label**

The first 12 bytes of the UMID provide identification of the UMID by the registered string value defined in table 1.

Byte No.	Description	Value (hex)
1	Object Identifier	06h
2	Label size	0Ch
3	Designation: ISO	2Bh
4	Designation: SMPTE	34h
5	Registry: Dictionaries	01h
6	Registry: Metadata Dictionaries	01h
7	Standard: Dictionary Number	01h
8	Version number	01h
9	Class: Identification and location	01h
10	Sub-class: Globally Unique Identifiers	01h
11	Type: UMID (Picture, Audio, Data, Group)	01, 02, 03, 04h
12	Type: Number creation method	XXh

**Table 1: Specification of the UMID Universal Label**

The hex values in table 1 may be changed: the values given are examples. Also the bytes 1-12 may have designations other than those shown by way of example in the table. Referring to the Table 1, in the example shown byte 4 indicates that bytes

5-12 relate to a data format agreed by SMPTE. Byte 5 indicates that bytes 6 to 10 relate to "dictionary" data. Byte 6 indicates that such data is "metadata" defined by bytes 7 to 10. Byte 7 indicates the part of the dictionary containing metadata defined by bytes 9 and 10. Byte 10 indicates the version of the dictionary. Byte 9 indicates the class of data and Byte 10 indicates a particular item in the class.

In the present embodiment bytes 1 to 10 have fixed pre-assigned values. Byte 11 is variable. Thus referring to Figure 15, and to Table 1 above, it will be noted that the bytes 1 to 10 of the label of the UMID are fixed. Therefore they may be replaced by a 1 byte 'Type' code T representing the bytes 1 to 10. The type code T is followed by a length code L. That is followed by 2 bytes, one of which is byte 11 of Table 1 and the other of which is byte 12 of Table 1, an instance number (3 bytes) and a material number (16 bytes). Optionally the material number may be followed by the signature metadata of the extended UMID and/or other metadata.

The UMID type (byte 11) has 4 separate values to identify each of 4 different data types as follows:

'01h' = UMID for Picture material

'02h' = UMID for Audio material

'03h' = UMID for Data material

'04h' = UMID for Group material (i.e. a combination of related essence).

The last (12th) byte of the 12 byte label identifies the methods by which the material and instance numbers are created. This byte is divided into top and bottom nibbles where the top nibble defines the method of Material number creation and the bottom nibble defines the method of Instance number creation.

### **Length**

The Length is a 1-byte number with the value '13h' for basic UMIDs and '33h' for extended UMIDs.

### **Instance Number**

The Instance number is a unique 3-byte number which is created by one of several means defined by the standard. It provides the link between a particular 'instance' of a clip and externally associated metadata. Without this instance number, all material could be linked to any instance of the material and its associated metadata.



The creation of a new clip requires the creation of a new Material number together with a zero Instance number. Therefore, a non-zero Instance number indicates that the associated clip is not the source material. An Instance number is primarily used to identify associated metadata related to any particular instance of a clip.

#### **Material Number**

The 16-byte Material number is a non-zero number created by one of several means identified in the standard. The number is dependent on a 6-byte registered port ID number, time and a random number generator.

#### **Signature Metadata**

Any component from the signature metadata may be null-filled where no meaningful value can be entered. Any null-filled component is wholly null-filled to clearly indicate a downstream decoder that the component is not valid.

#### **The Time-Date Format**

The date-time format is 8 bytes where the first 4 bytes are a UTC (Universal Time Code) based time component. The time is defined either by an AES3 32-bit audio sample clock or SMPTE 12M depending on the essence type.

The second 4 bytes define the date based on the Modified Julian Data (MJD) as defined in SMPTE 309M. This counts up to 999,999 days after midnight on the 17th November 1858 and allows dates to the year 4597.

#### **The Spatial Co-ordinate Format**

The spatial co-ordinate value consists of three components defined as follows:

- Altitude: 8 decimal numbers specifying up to 99,999,999 metres.
- Longitude: 8 decimal numbers specifying East/West 180.00000 degrees (5 decimal places active).
- Latitude: 8 decimal numbers specifying North/South 90.00000 degrees (5 decimal places active).

The Altitude value is expressed as a value in metres from the centre of the earth thus allowing altitudes below the sea level.

It should be noted that although spatial co-ordinates are static for most clips, this is not true for all cases. Material captured from a moving source such as a camera mounted on a vehicle may show changing spatial co-ordinate values.

### **Country Code**

The Country code is an abbreviated 4-byte alpha-numeric string according to the set defined in ISO 3166. Countries which are not registered can obtain a registered alpha-numeric string from the SMPTE Registration Authority.

### 5      **Organisation Code**

The Organisation code is an abbreviated 4-byte alpha-numeric string registered with SMPTE. Organisation codes have meaning only in relation to their registered Country code so that Organisation codes can have the same value in different countries.

### 10      **User Code**

The User code is a 4-byte alpha-numeric string assigned locally by each organisation and is not globally registered. User codes are defined in relation to their registered Organisation and Country codes so that User codes may have the same value in different organisations and countries.

### 15      **Freelance Operators**

Freelance operators may use their country of domicile for the country code and use the Organisation and User codes concatenated to e.g. an 8 byte code which can be registered with SMPTE. These freelance codes may start with the '~' symbol ( ISO 8859 character number 7Eh) and followed by a registered 7 digit alphanumeric string.

20      As will be appreciated by those skilled in the art various modifications may be made to the embodiments herein before described without departing from the scope of the present invention. For example whilst embodiments have been described with recording audio/video onto magnetic tape, it will be appreciated that other recording media are possible.

25      As will be appreciated those features of the invention which appear in the example embodiments as a data processor or processing units could be implemented in hard ware as well as a software computer program running on an appropriate data processor. Correspondingly those aspects and features of the invention which are described as computer or application programs running on a data processor may be  
30      implemented as dedicated hardware. It will therefore be appreciated that a computer program running on a data processor which serves to form an audio and/or video generation apparatus as herein before described is an aspect of the present invention.

Similarly a computer program recorded onto a recordable medium which serves to define the method according to the present invention or when loaded onto a computer forms an apparatus according to the present invention are aspects of the present invention.

CLAIMS

1. A video generation apparatus which is arranged in operation to generate video signals representative of an image source, said video generation apparatus comprising

- 5       - a recording processor which is arranged in operation to record said video signals on a recording medium, and
- a metadata generation processor which is arranged in operation to receive said video signals and to generate at least one sample image which is representative of a video image from said recorded video signals, and to associate said sample image with
- 10     an address on said recording medium at which said video image is recorded.

2. An video generation apparatus as claimed in Claim 1, wherein said at least one sample image is first and second sample images, said first of said sample images being generated for a video image at an in point of said at least part of said video signals and said second of said sample images being generated for a video image

15     at an out point of said at least part of said video signals, and said address is a first and second address, said first address indicating the place on said recording medium at which said in point video image is recorded, and said second address indicating the place on said recording medium at which said out point video image is recorded.

20

3. A video generation apparatus as claimed in Claim 1, comprising

      - an activity detector coupled to said metadata generation processor and arranged in operation to receive said video signals and to generate an activity signal indicative of a relative change of content of said video signals, wherein

- 25       - said metadata generation processor is arranged in operation to generate a plurality sample images, each of which is representative of a video image from said recorded video signals, said sample images being generated at times of change of content of said video signals indicated by said activity signal, an address of each of said sample images providing the location on said recording medium at which the
- 30     corresponding video image is recorded.

4. A video generation apparatus as claimed in Claim 3, wherein said activity detector generates said activity signal by forming a histogram of colour components of said video image and determining a rate of change of said colour components.

5

5. A video generation apparatus as claimed in Claims 3 or 4, wherein said activity detector generates said activity signal by from motion vectors of image components of said video image signal.

10

6. A video generation apparatus as claimed in any preceding Claim,  
- a display processor which is arranged in operation to provide a visible representation of said sample images.

15

7. A video generation apparatus as claimed in any preceding Claim,  
wherein said video signals are representative of a plurality of video material items, and said metadata generation processor is arranged in operation to generate a preference marker in response to commands from a user in association with selected ones of said video material items.

20

8. A video generation apparatus as claimed in Claim 7, wherein said metadata generation processor is arranged in operation to record data representative of said preference marker on said recording medium.

25

9. A video generation apparatus as claimed in any preceding Claim,  
comprising  
- a data store coupled to said metadata generation processor, said at least one sample image and said address being stored in said data store separately from said recording medium.

30

10. A video generation apparatus as claimed in Claim 9, wherein said data representing said preference marker is stored in said data store in association with the sample image and the address corresponding to a selected video material item.

11. A video generation apparatus as claimed in any preceding Claim, wherein said recording medium is a random access memory, and said address indicates a place in said memory where said video image is recorded.

5

12. A video generation apparatus as claimed in any of Claims 1 to 10, wherein said recording medium is a linear recording medium and said address is a time code corresponding to a place on said recording medium where said video image is recorded.

10

13. A video generation apparatus as claimed in any preceding Claim, wherein said metadata processor generates said sample images in accordance with a compression encoding process such as the Joint Photographic Experts Group compression encoding process.

15

14. A video generation apparatus as claimed in Claim any preceding Claim, wherein said metadata includes a unique identification code for identifying the video signals.

20

15. A video generation apparatus as claimed in Claim 14, wherein the unique identification code is a UMID or the like.

16. A metadata generation processor comprising  
- a sample image generation processor which is arranged in operation to  
25 receive video signals being recorded on to a recording medium, and to generate at least one sample image which is representative of a video image from the video signals being recorded, and

30

- an address detector which is arranged in operation to associate the sample image with an address on the recording medium at which the video image is recorded.

17. A metadata generation processor as claimed in Claim 16, wherein said at least one sample image is first and second sample images, said first of said sample

images being generated for a video image at an in point of said at least part of said video signals and said second of said sample images being generated for a video image at an out point of said at least part of said video signals, and said address is a first and second address, said first address indicating the place on said recording medium at which said in point video image is recorded, and said second address indicating the place on said recording medium at which said out point video image is recorded.

18. A metadata generation processor as claimed in Claims 16, comprising  
- an activity detector arranged in operation to receive said video signals and to  
10 generate an activity signal indicative of a relative change of content of said video signals, wherein  
- said sample image generation processor is arranged in operation to generate a plurality sample images, each of which is representative of a video image from said recorded video signals, said sample images being generated at times of change of  
15 content of said video signals indicated by said activity signal, an address of each of said sample images providing the location on said recording medium at which the corresponding video image is recorded.

19. A metadata generation processor as claimed in Claim 18, wherein said  
20 activity detector generates said activity signal by forming a histogram of colour components of said video image and determining a rate of change of said colour components.

20. A metadata generation processor as claimed in Claims 18 or 19,  
25 wherein said activity detector generates said activity signal by from motion vectors of image components of said video image signal.

21. A metadata generation processor as claimed in any of Claims 16 to 20,  
comprising  
30 - a sample image generation processor which is arranged in operation to receive video signals and to generate at least one sample image which is representative of a video image from the video signals, and

- an address detector which is arranged in operation to associate the sample image with an address of the video image in the video signals.

22. A method of generating video signals representative of an image  
5 source, said method comprising the steps of
- forming said video signals,
  - recording said video signals on a recording medium,
  - generating at least one sample image which is representative of a video image  
from said recorded video signals, and
- 10 - associating said sample image with an address on said recording medium at which said video image is recorded.

23. A method of generating video signals as claimed in Claim 22, wherein the step of generating at least one sample image comprises the step of
- 15 - generating first and second sample images, said first of said sample images being generated for a video image at an in point of said at least part of said video signals and said second of said sample images being generated for a video image at an out point of said at least part of said video signals, and the step of associating said at least one sample image with an address comprises the step of
- 20 - generating a first and second address, said first address indicating the place on said recording medium at which said in point video image is recorded, and said second address indicating the place on said recording medium at which said out point video image is recorded.

24. A method of generating video signals as claimed in Claim 22, wherein the step of generating at least one sample image comprises the step of
- 25 - generating an activity signal indicative of a relative change of content of said video signals, and
- generating a plurality sample images, each of which is representative of a  
30 video image from said recorded video signals, said sample images being generated at times of change of content of said video signals indicated by said activity signal, and



the step of associating said at least one sample image with an address comprises the step of

- providing the location of each of said plurality of sample images on said recording medium at which the corresponding video image is recorded.

5

25. A computer program providing computer executable instructions, which when loaded on to a data processor configures said data processor to operate as a video generation apparatus as claimed in any of Claims 1 to 15, or a metadata generation processor as claimed in any of Claims 16 to 21.

10

26. A computer program having computer executable instructions, which when loaded on to a data processor causes the data processor to perform the method according to any of Claims 22 to 24.

15

27. A computer program product having a computer readable medium having recorded thereon information signals representative of the computer program Claimed in any of Claims 25 or 26.

20

28. A video generation apparatus as herein before described with reference to the accompanying drawings.

29. A method of recording video signals as herein before described with reference to the accompanying drawings.

**ABSTRACT****VIDEO GENERATION APPARATUS AND METHOD OF GENERATING  
VIDEO SIGNALS**

A video generation apparatus which is arranged in operation to generate video  
5 signals representative of a video image source, the video generation apparatus  
comprising a recording processor which is arranged in operation to record the video  
signals on a recording medium, and a metadata generation processor which is arranged  
in operation to receive the video signals and to generate at least one sample image  
which is representative of a video image from the recorded video signals, and to  
10 associate the sample image with an address on the recording medium at which the  
image is recorded.

[Fig 4]

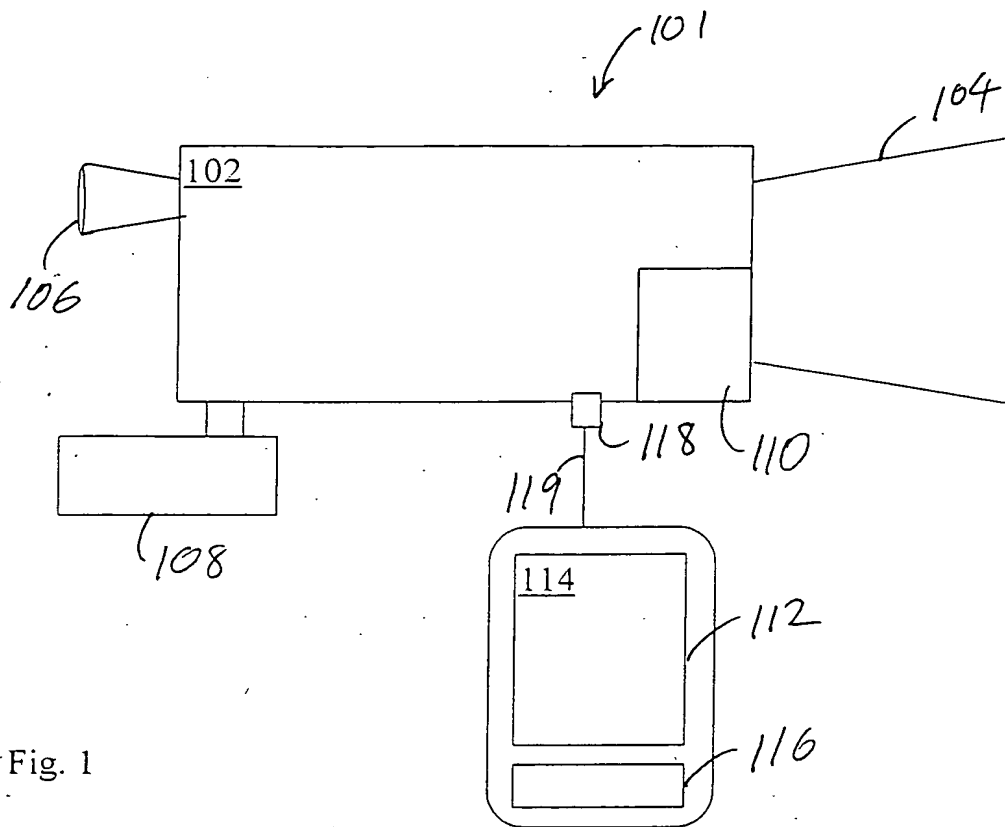


Fig. 1

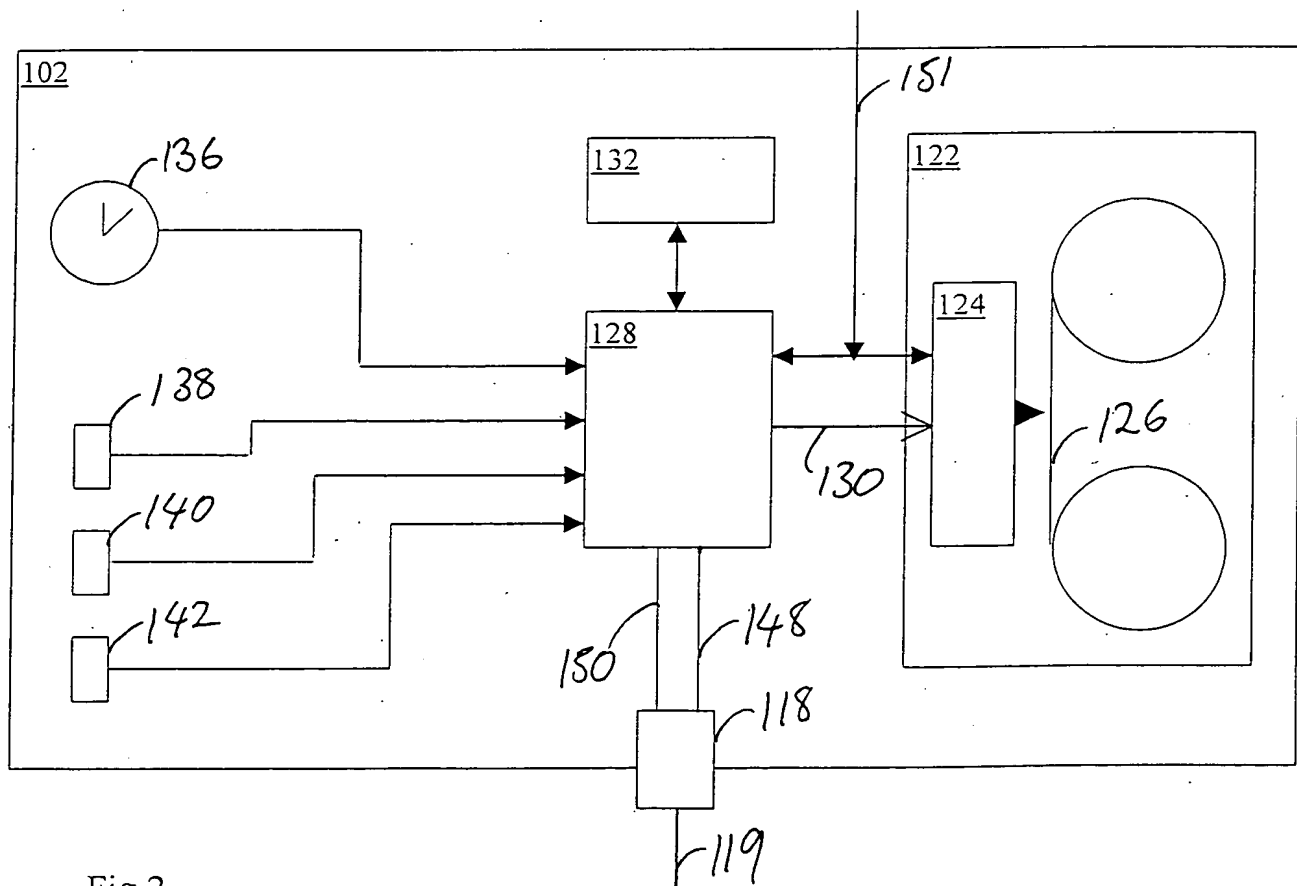


Fig 2

**THIS PAGE BLANK (USPTO)**

P/8748 GB

2/12

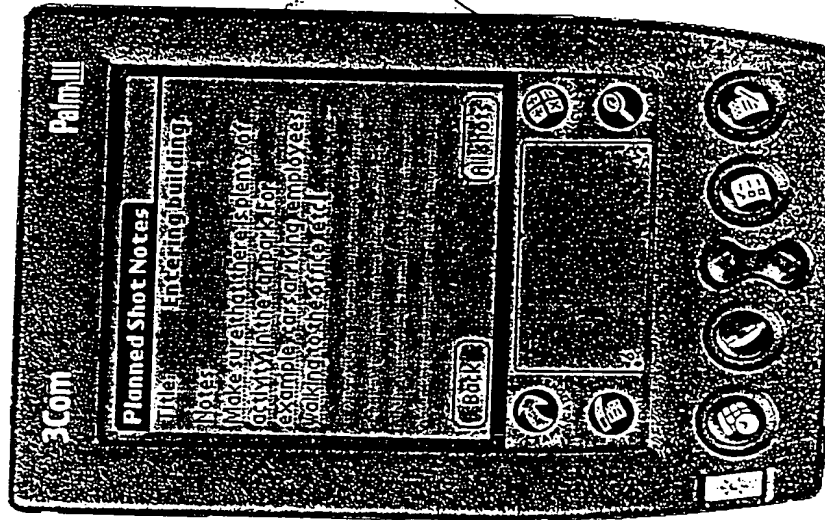


Fig 3

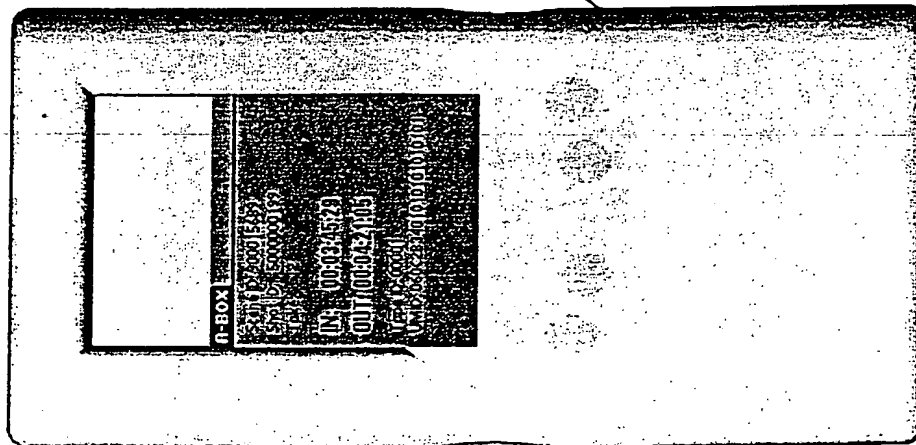


Fig 5

**THIS PAGE BLANK (USPTO)**

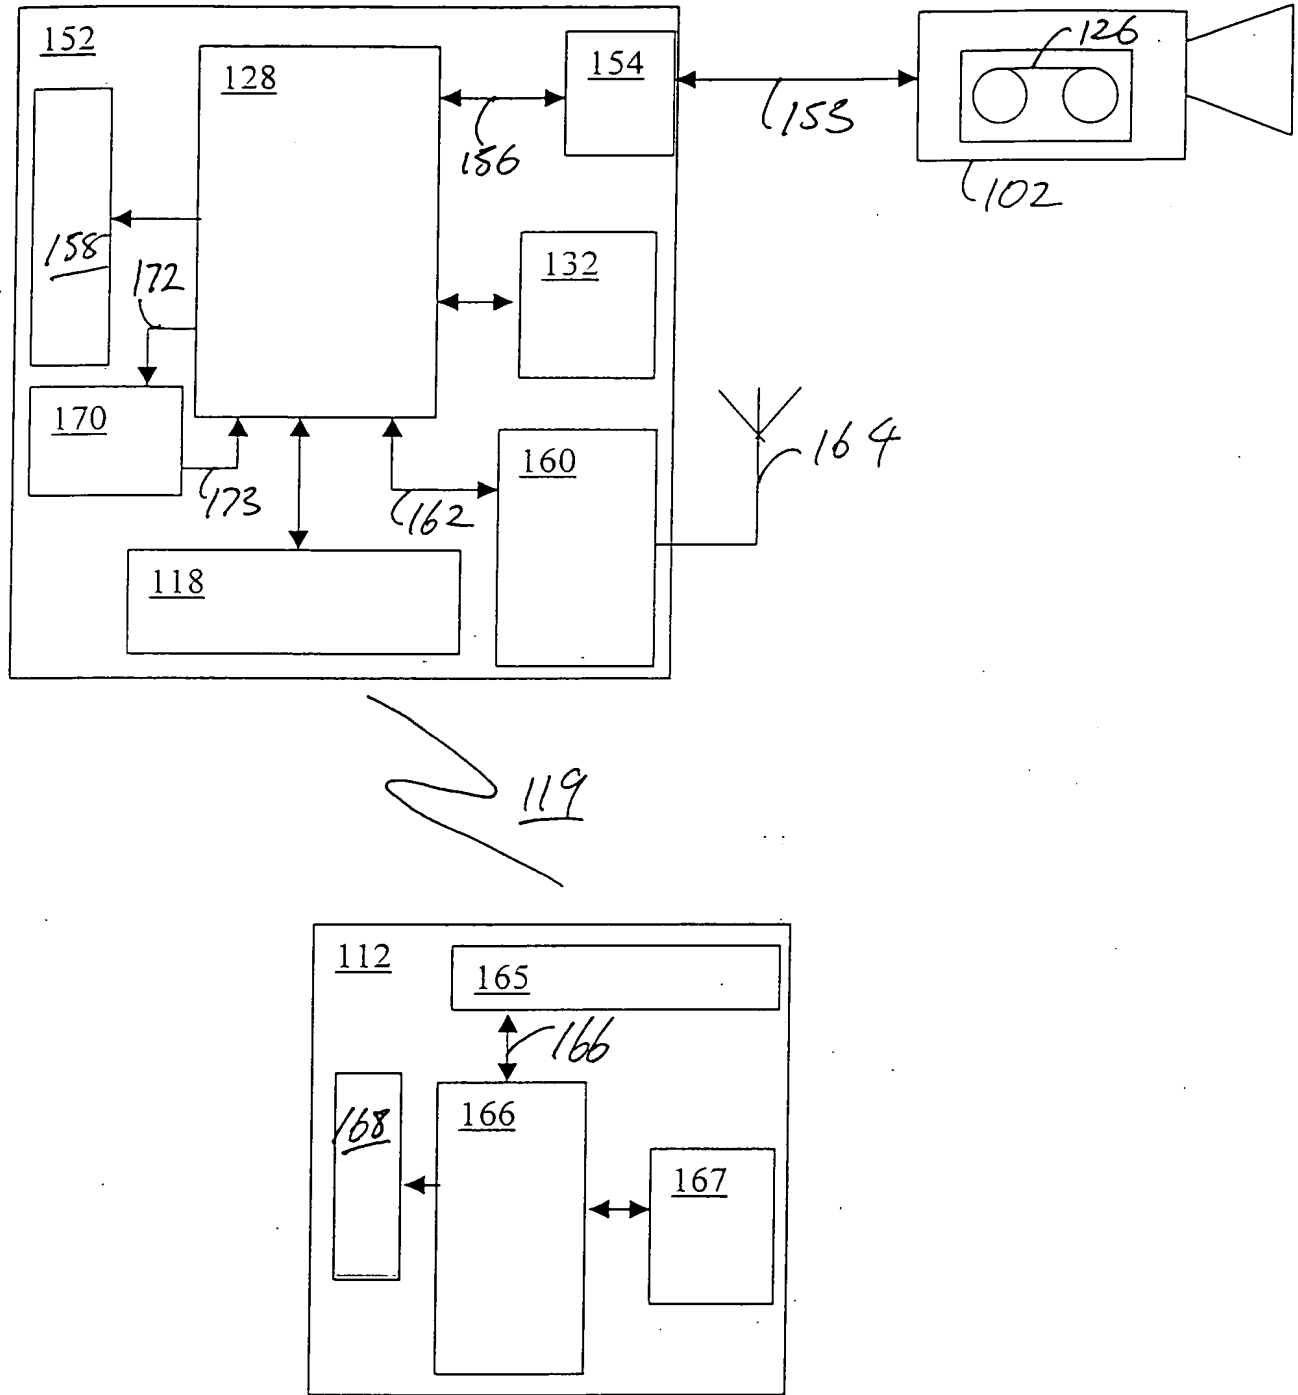


Fig 4

**THIS PAGE BLANK (USPTO)**






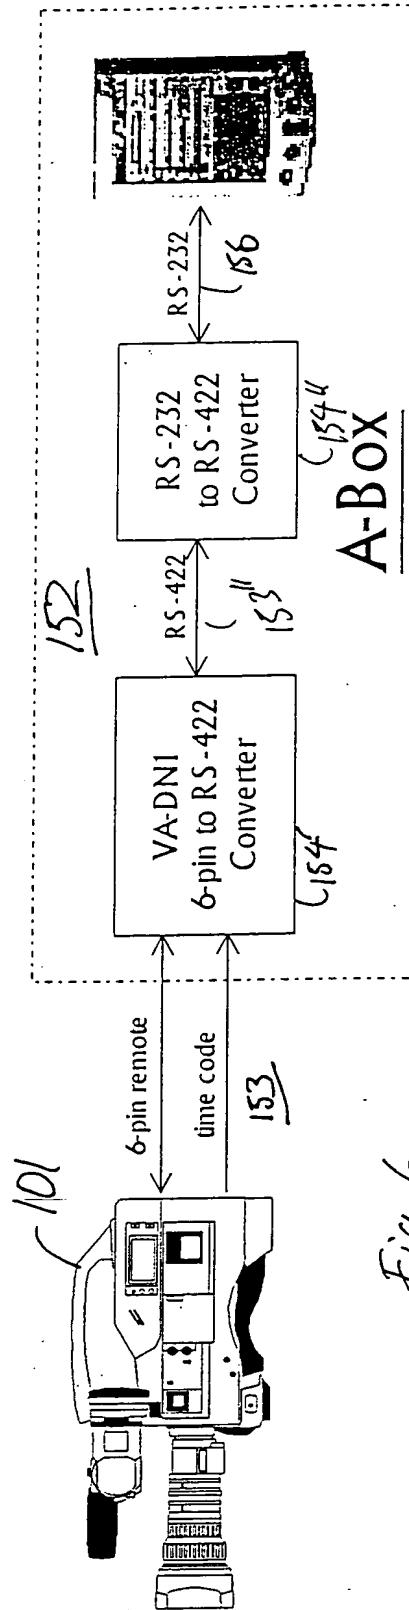


Fig. 6

**THIS PAGE BLANK (USPTO)**

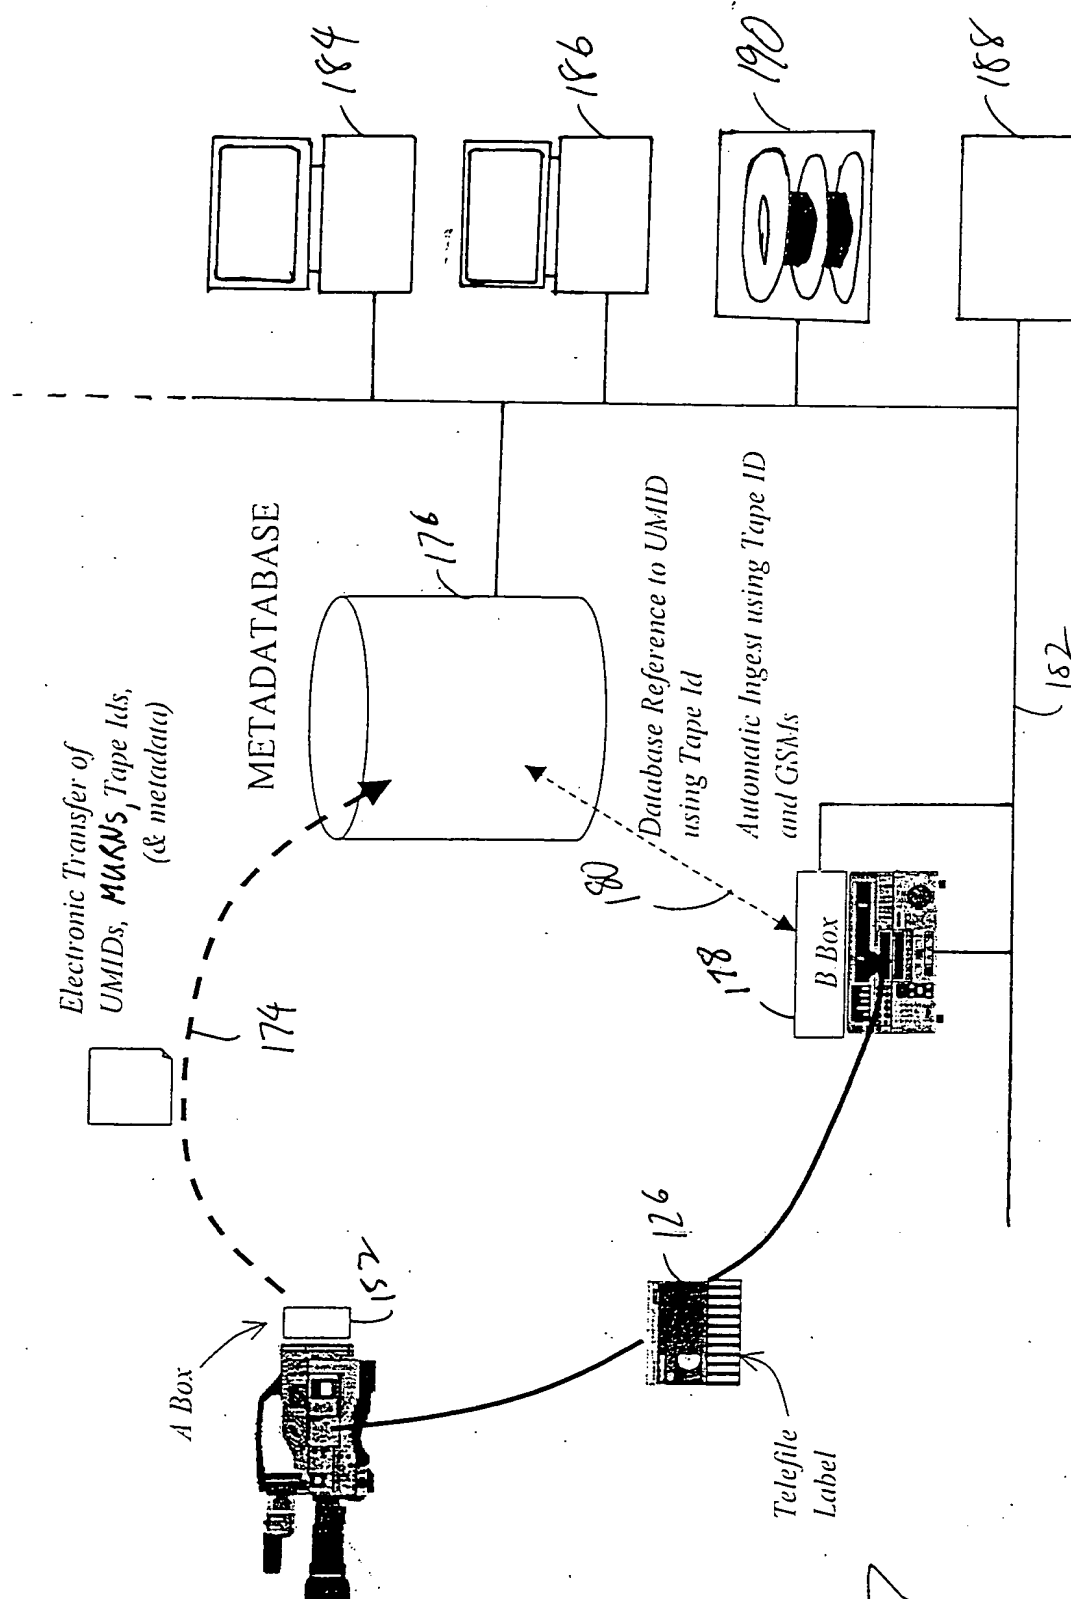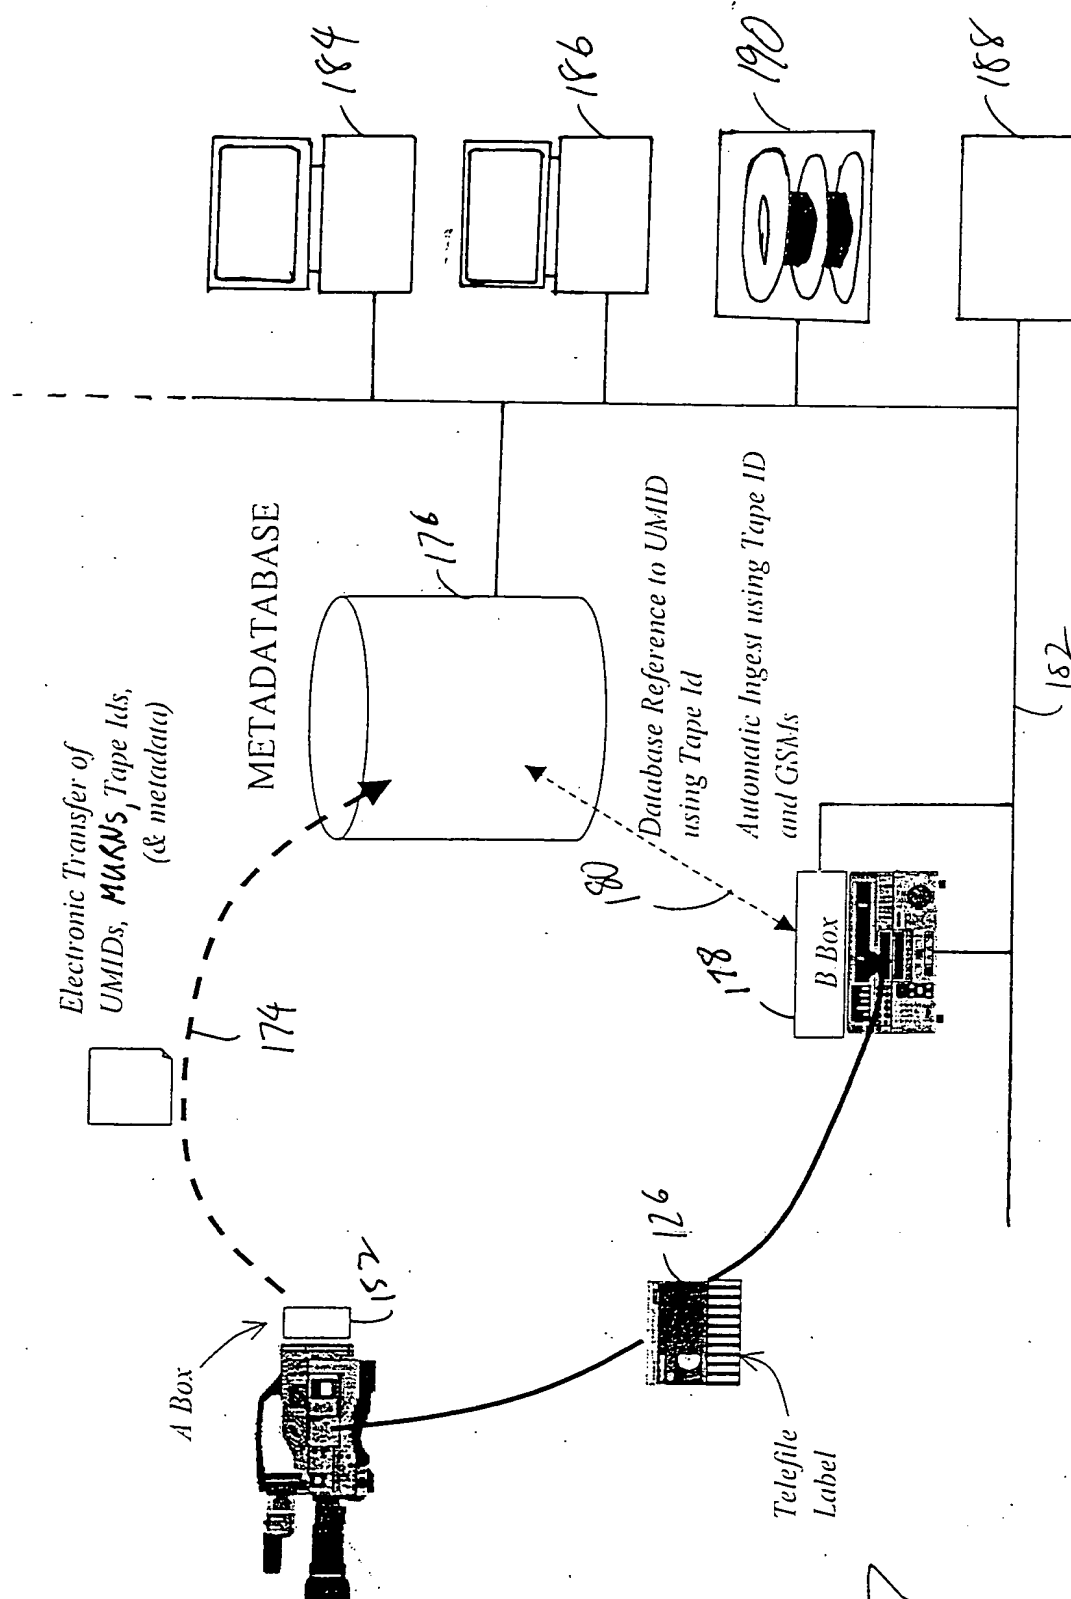

**THIS PAGE BLANK (USPTO)**

P/8748-GB

6/12

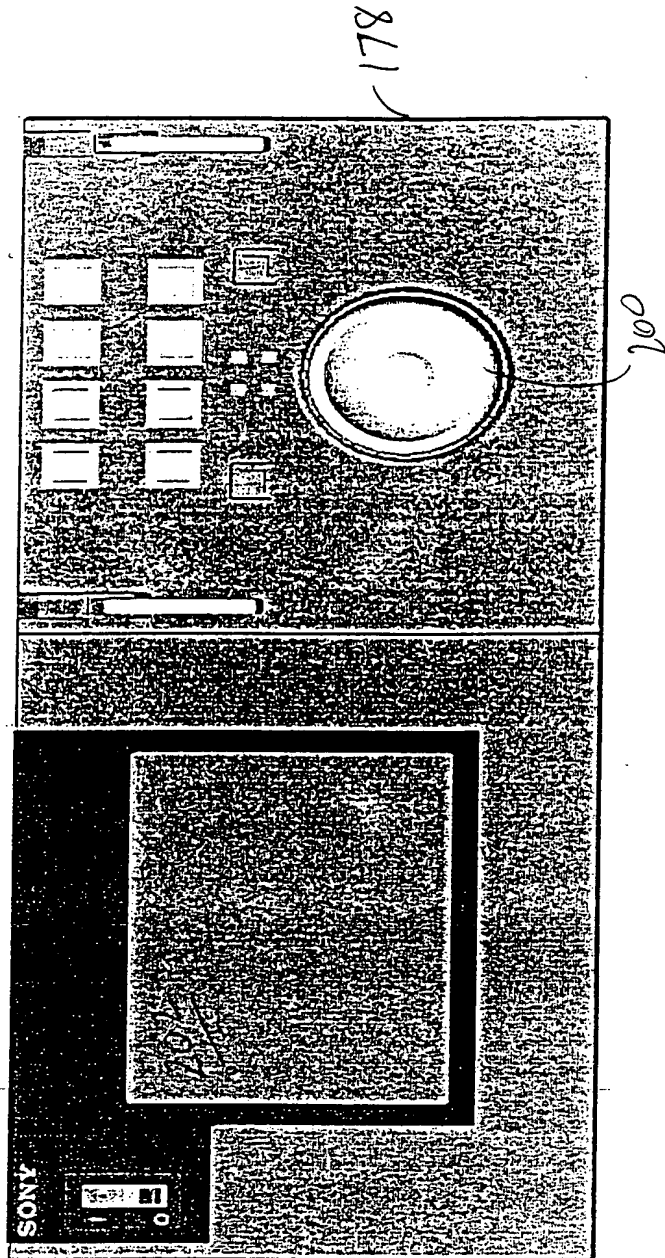


Fig. 8

**THIS PAGE BLANK (USPTO)**

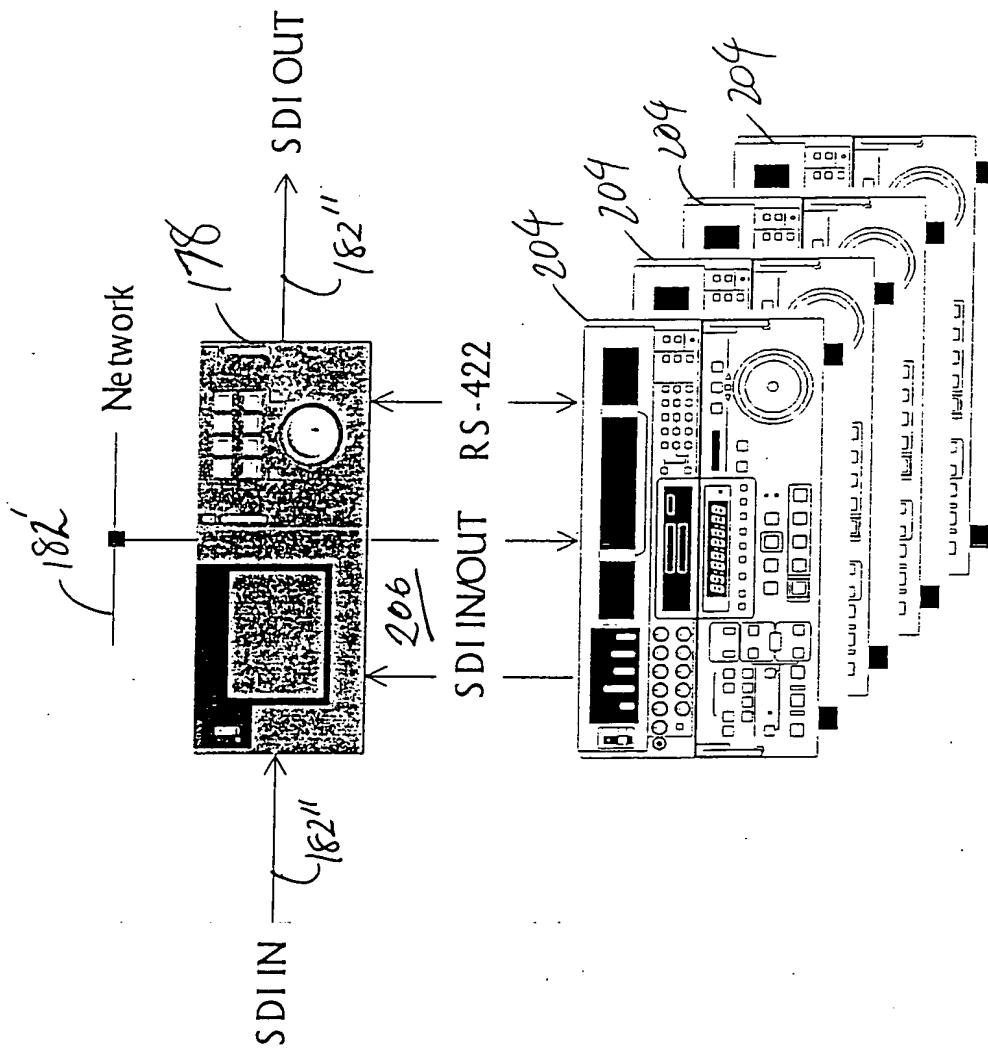


Fig. 9

**THIS PAGE BLANK (USPTO)**




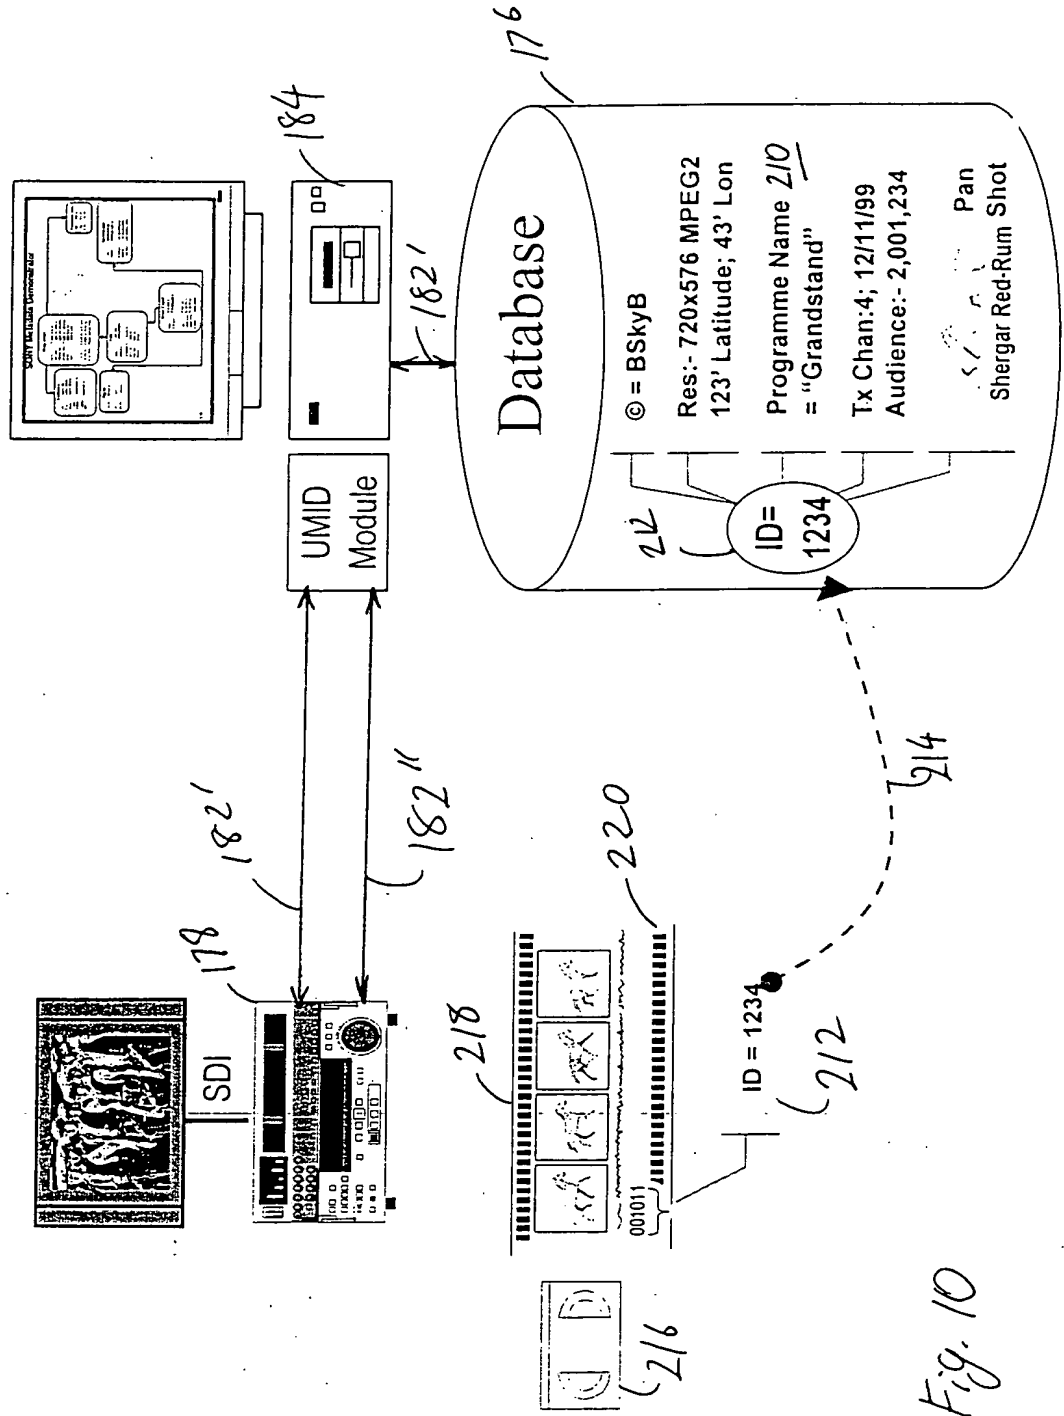


Fig. 10

**THIS PAGE BLANK (USPTO)**

9/12

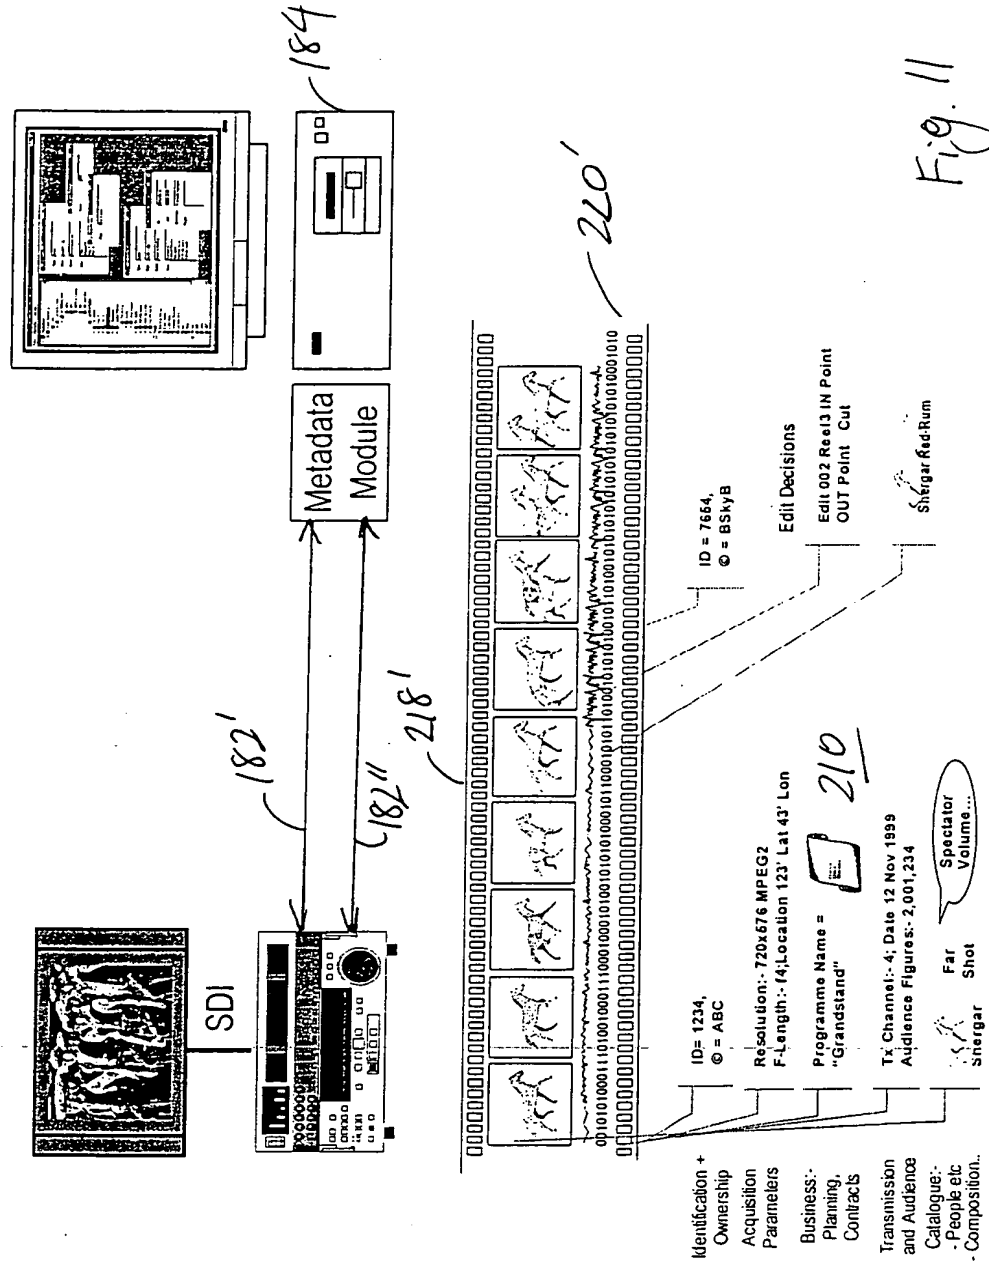

**THIS PAGE BLANK (USPTO)**

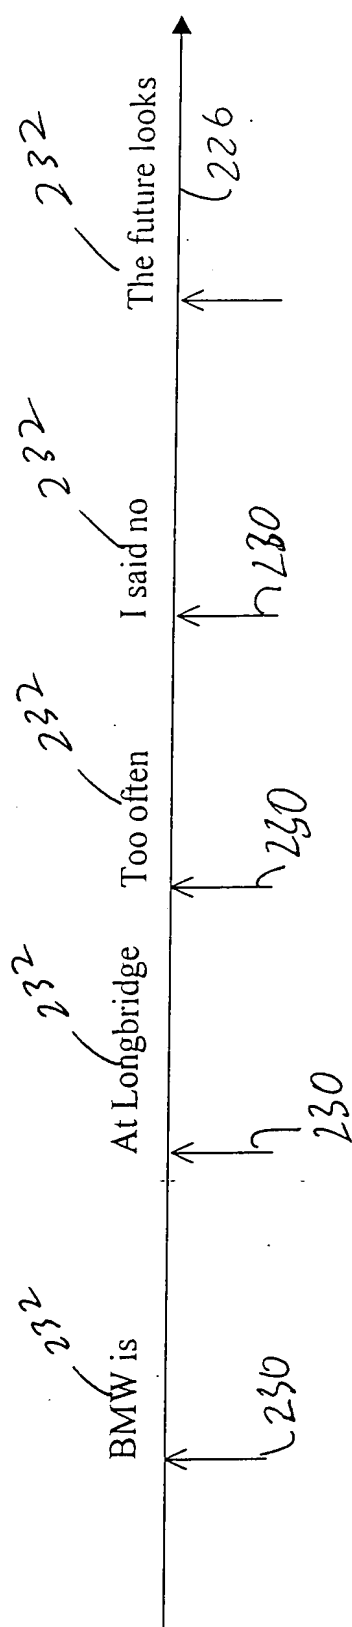
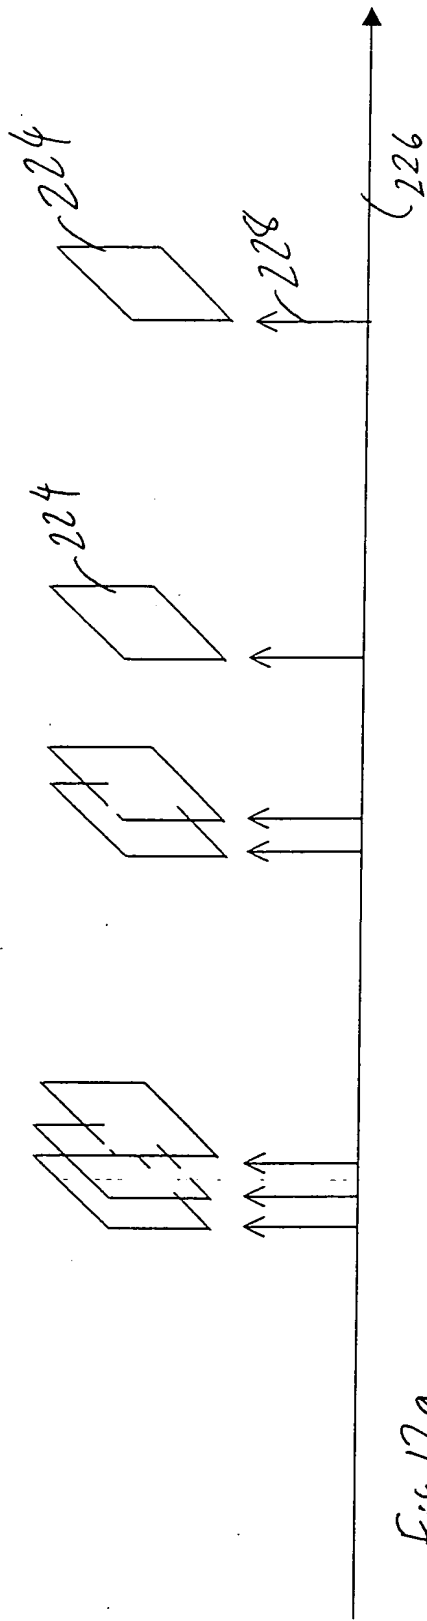


Fig 12 b

**THIS PAGE BLANK (USPTO)**

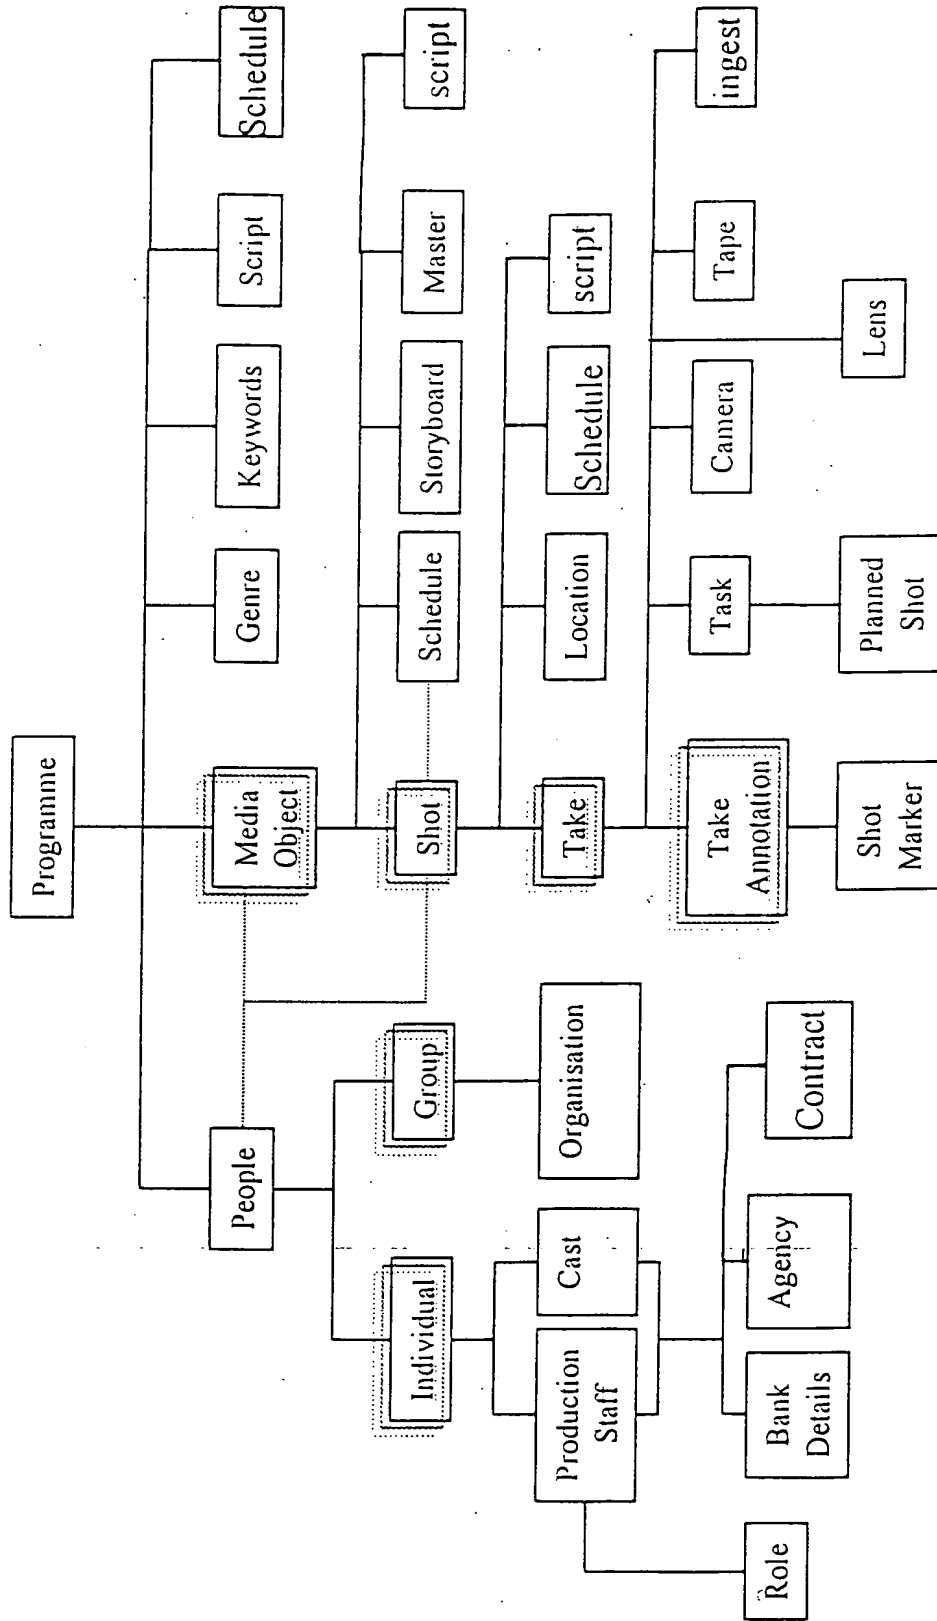


Figure 13

**THIS PAGE BLANK (USPTO)**



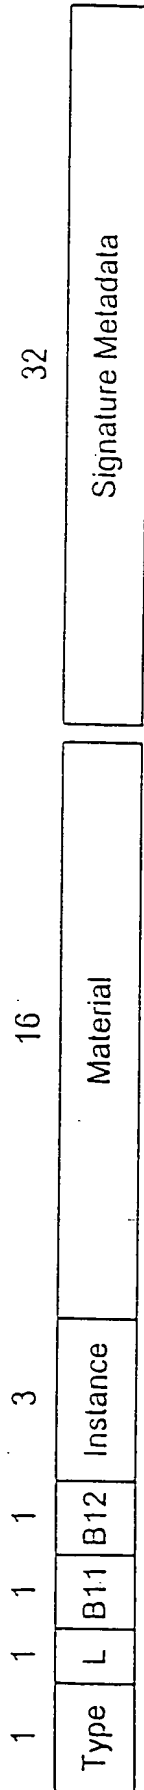


Fig. 14

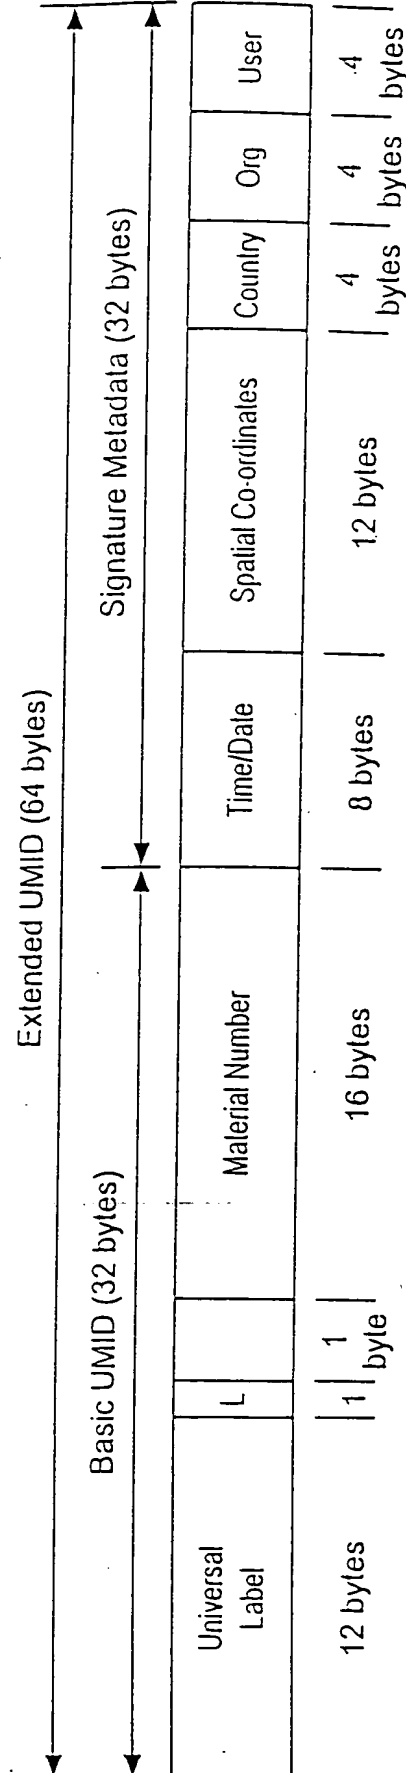


Fig. 15 Basic and Extended UMID Structures.

**THIS PAGE BLANK (USPTO)**